


Masonry - Thin Brick, Xci Foil (Class A) and Xci 286, Steel Stud

View WRB placement variations p.2

WrapShield SA Self-Adhered is a self-adhered, water resistive (WRB) vapor permeable air barrier sheet membrane adhered directly to substrate.

RevealShield SA Self-Adhered is a black, UV stable, water resistive (WRB) vapor permeable self-adhered air barrier membrane for open joint rain screen cladding systems.

Per Chapter 26 of the International Building Code, the wall assembly shall be tested in accordance with and comply with the acceptance criteria of NFPA 285. The listed assemblies in this document have met that criteria according to Hunter Panels. Visit hunterpanels.com for verification.

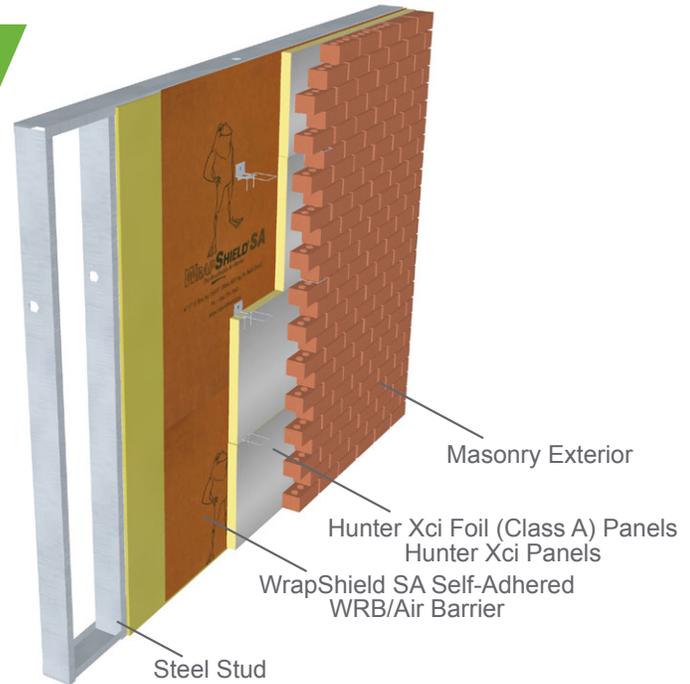

Comprehensive details available at VaproShield.com.
Illustration for explanatory purposes only.

Wall Component

Materials

Base Wall System

Steel Stud — 1 layer 5/8" thick Type X Gypsum wallboard on interior, installed over steel studs: minimum 3 5/8" depth, minimum 22 gauge at a maximum of 24 inch o.c. with lateral bracing every 4 ft. vertically.

Approved Exterior Finish

Masonry—Brick veneer anchors, standard types, installed maximum 24" o.c. vertically. Maximum 2" air gap between exterior insulation and brick. Standard normal 4" thick or greater, clay brick.

Thin Brick—Thin brick set in thin set adhesive and metal lath that has been tested to and passed the ASTM E119 standards or passes NFPA 285 at 3/4" minimum.

TABS Panel II System—1/2" thick bricks using TABS Wall Adhesive

Material Options

- 1) 4.2" max thickness of **Hunter Xci Ply**, inclusive of factory adhered 5/8" or 3/4" Fire Treated Plywood or FSC® Certified Fire Treated Plywood within overall max thickness
- 2) 4.7" max thickness of **Hunter Xci Ply**, inclusive of factory adhered 5/8" or 3/4" Fire Treated Plywood or FSC® Certified Fire Treated Plywood within overall max thickness with non-combustible claddings

Floorline Firestopping

Mineral fiber based safig insulation in each cavity at the floor line. Safig thickness must match cavity depth. Or Solid FRTW blocking at floor line in accordance with building code requirements for Type III construction.

Stud Cavity

Any noncombustible insulation, Covestro BaySeal CC X or CC CP**, BASF Walltite**, NCFI InsulBlock SPF**, Icynene MD-C-200v3 (ProSeal) up to 5 1/2" ** or None

Exterior Sheathing

1/2" (min) thick exterior gypsum sheathing OR 1/2" (min) FRTW structural panels in Type III construction. OR None*

Weather Resistive Membrane Applied to Base Wall

VaproShield WrapShield SA Self-Adhered, RevealShield SA Self-Adhered

Weather Resistive Membrane Applied to Exterior Insulation

VaproShield WrapShield SA Self-Adhered, RevealShield SA Self-Adhered

The location and number of WRB's in the wall assembly are determined by the architect. See p.2 for additional illustrations showing VaproShield WRB/Air Barrier placement.