


WrapShield SA Self-Adhered over Dow Styrofoam Brand CavityMate SC Insulation in Rain Screen Design

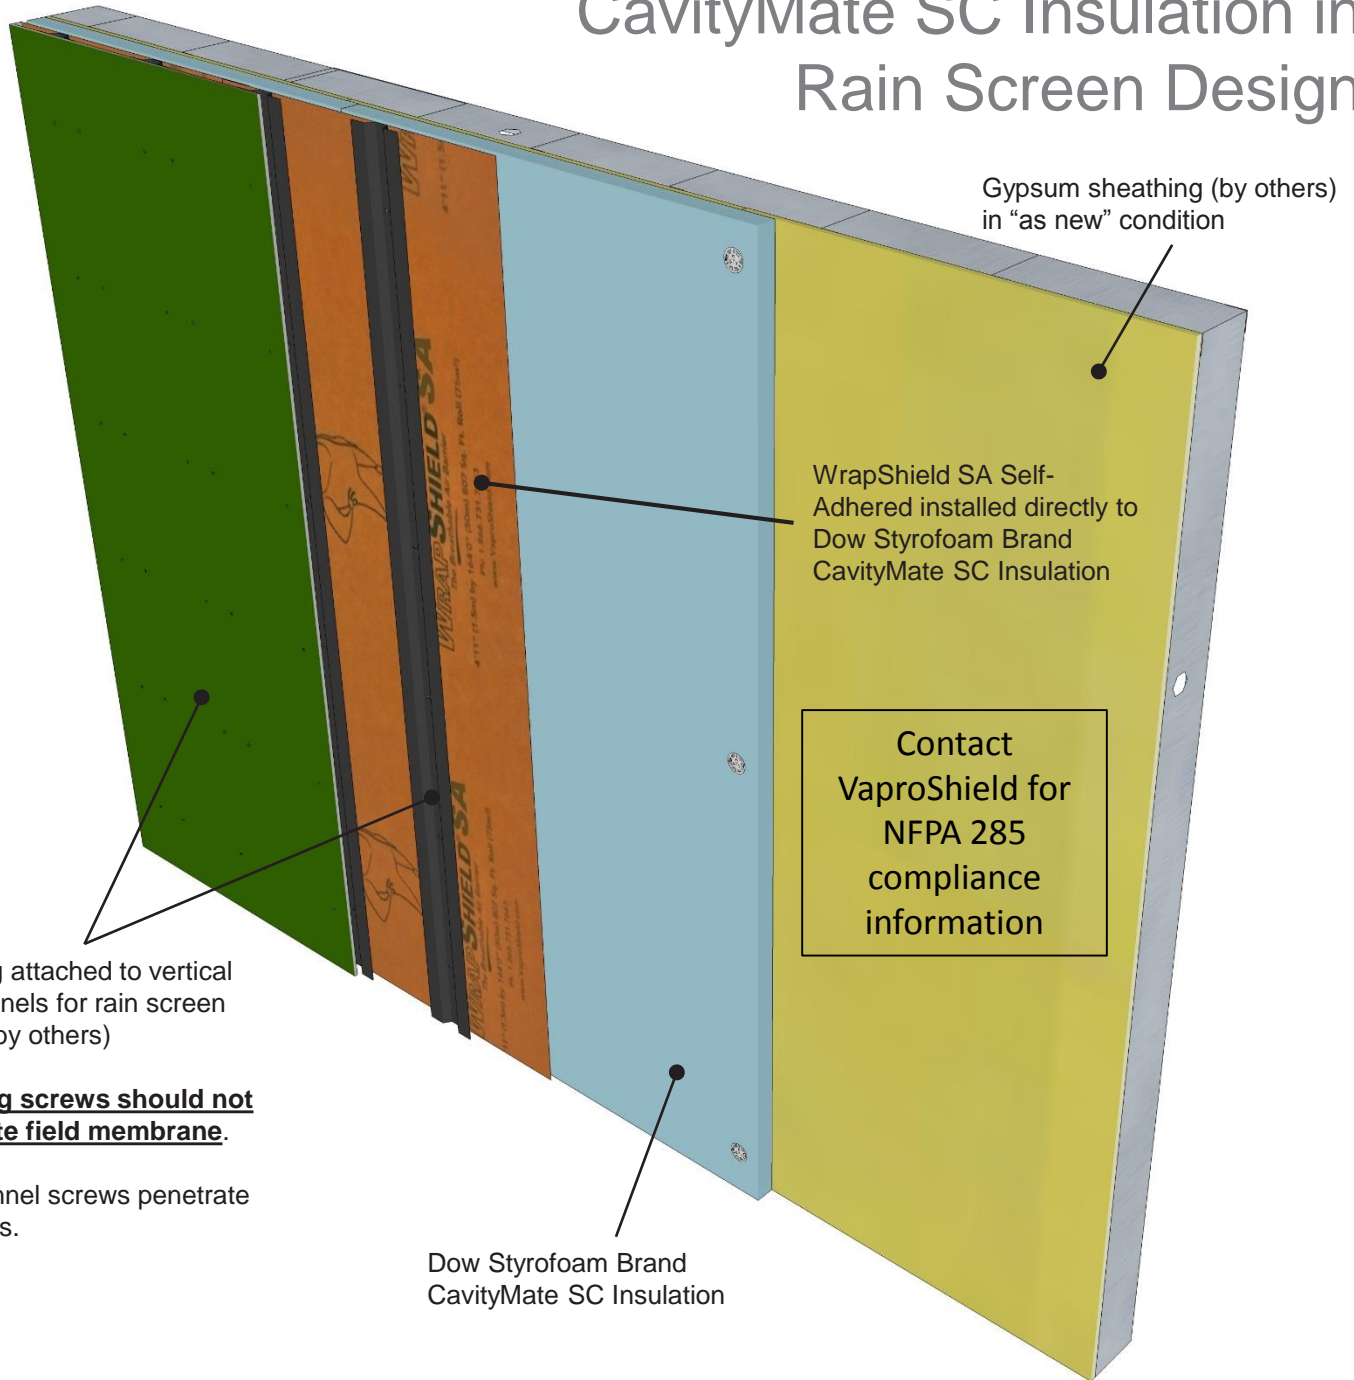

Cladding attached to vertical hat channels for rain screen design (by others)

Cladding screws should not penetrate field membrane.

Hat channel screws penetrate into studs.

Gypsum sheathing (by others) in "as new" condition

WrapShield SA Self-Adhered installed directly to Dow Styrofoam Brand CavityMate SC Insulation

Contact VaproShield for NFPA 285 compliance information

Dow Styrofoam Brand CavityMate SC Insulation

WRAPSHIELD SA[®]
SELF-ADHERED

DRAWN BY: AR

DATE: 07.27.16

PRODUCT DESCRIPTION

WrapShield SA is a self-adhered, water resistive vapor permeable air barrier sheet membrane

DISCLAIMER

Detail sketch is generic, representing suggested best practices for VaproShield materials, and does not represent a specific job site condition and therefore may not be applicable to certain projects. Detail sketch is designed for use as a reference and must be approved by the designer/consultant of record for each project prior to installation by the subcontractor. Changes and approvals of VaproShield details are the sole responsibility of the designer/consultant of record. VaproShield is **not** the designer of record for building enclosure details and takes no responsibility for the accuracy or interpretation of actual project site conditions.

REF: 172-C

Always check www.VaproShield.com for the latest details and installation instructions