

## VAPROLIQUI-FLASH™

### PRODUCT DESCRIPTION

VaproLiqui-Flash is a liquid applied, vapor permeable, waterproof, air barrier flashing system component for window and door rough openings. VaproLiquiFlash is designed to work with VaproFlashing and VaproShield field membranes as a complete system.

### DISCLAIMER


Detail sketch is generic, representing suggested best practices for VaproShield materials, and does not represent a specific job site condition and therefore may not be applicable to certain projects. Detail sketch is designed for use as a reference and must be approved by the designer/consultant of record for each project prior to installation by the subcontractor. Changes and approvals of VaproShield details are the sole responsibility of the designer/consultant of record. VaproShield is **not** the designer of record for building enclosure details and takes no responsibility for the accuracy or interpretation of actual project site conditions.

DRAWN BY: CD

DATE: 09.14.16

REF: 170

Always check [www.VaproShield.com](http://www.VaproShield.com) for the latest details and installation instructions

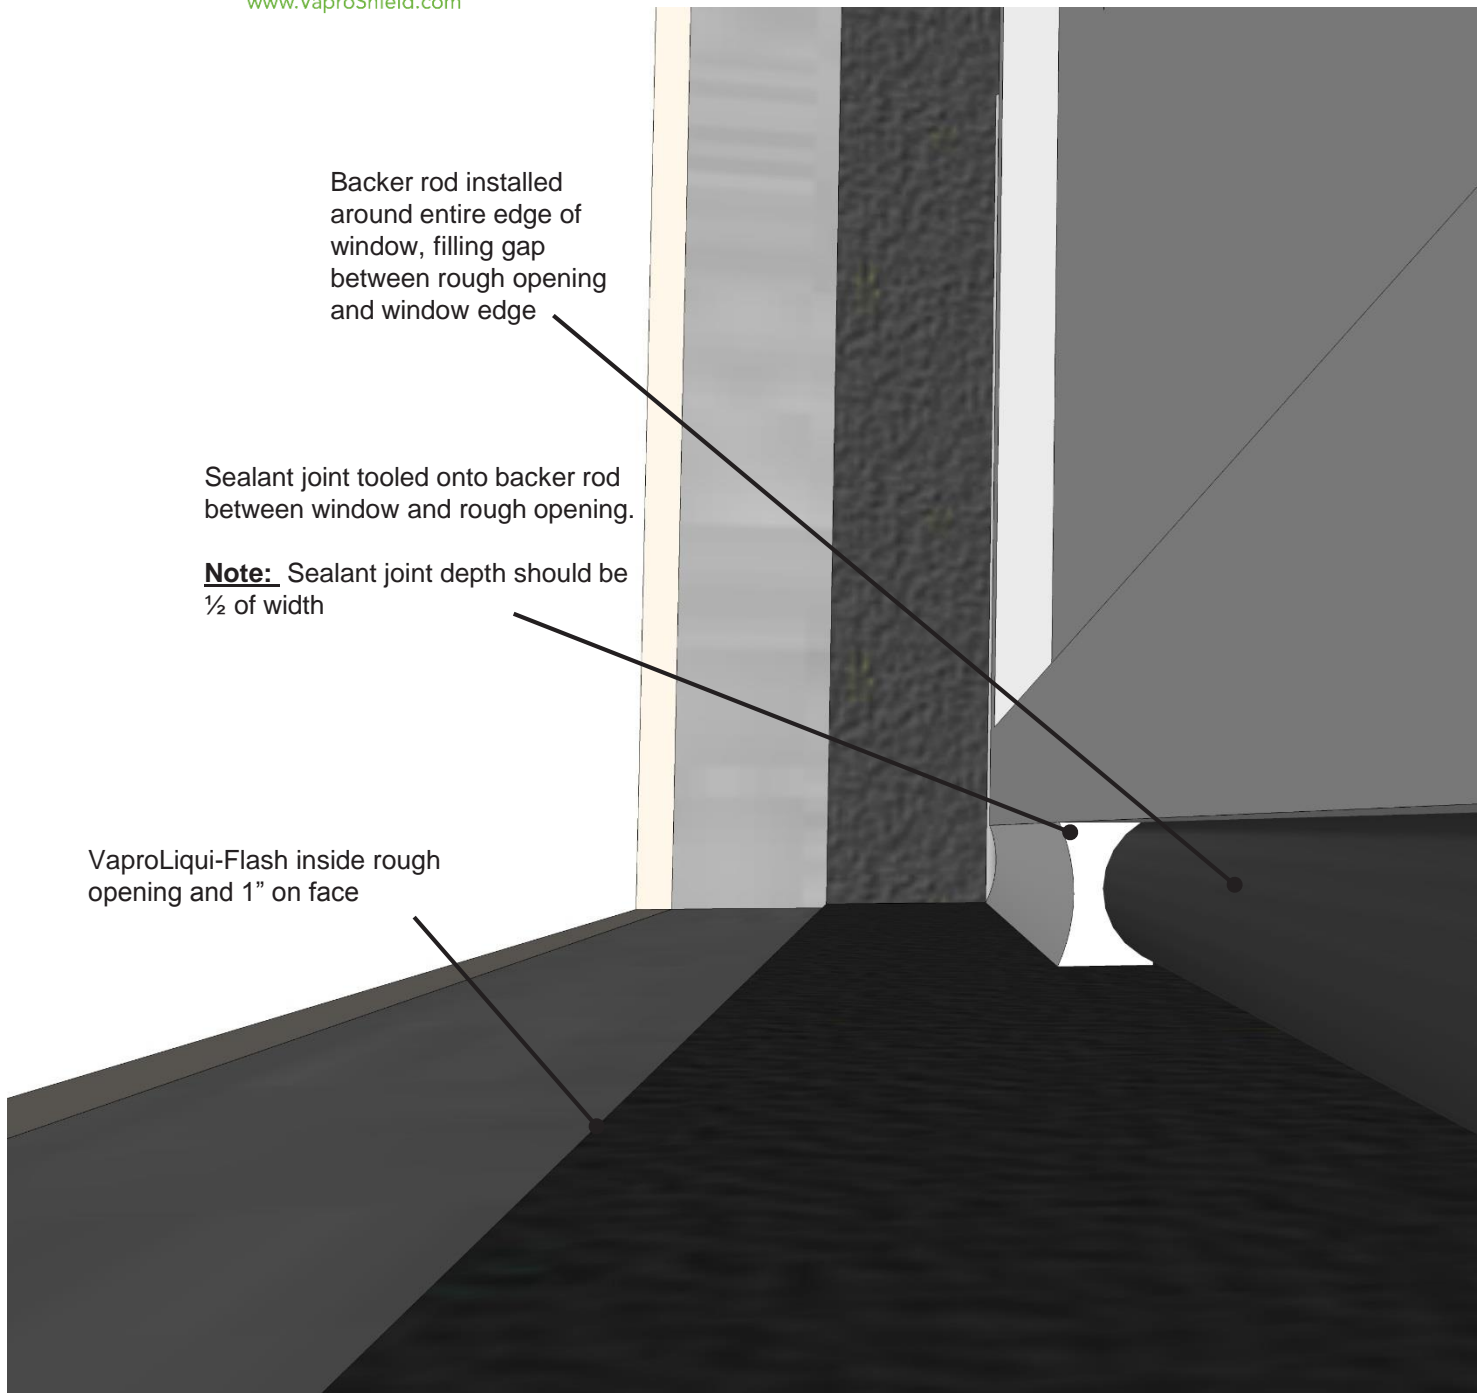

Backer rod installed around entire edge of window, filling gap between rough opening and window edge

Sealant joint tooled onto backer rod between window and rough opening.

**Note:** Sealant joint depth should be 1/2 of width

VaproLiqui-Flash inside rough opening and 1" on face

**VAPROLIQUI-FLASH**<sup>™</sup>

DRAWN BY: CD

DATE: 09.14.16

**PRODUCT DESCRIPTION**

VaproLiqui-Flash is a liquid applied, vapor permeable, waterproof, air barrier flashing system component for window and door rough openings. VaproLiquiFlash is designed to work with VaproFlashing and VaproShield field membranes as a complete system.

**DISCLAIMER**

Detail sketch is generic, representing suggested best practices for VaproShield materials, and does not represent a specific job site condition and therefore may not be applicable to certain projects. Detail sketch is designed for use as a reference and must be approved by the designer/ consultant of record for each project prior to installation by the subcontractor. Changes and approvals of VaproShield details are the sole responsibility of the designer/consultant of record. VaproShield is **not** the designer of record for building enclosure details and takes no responsibility for the accuracy or interpretation of actual project site conditions.

REF: 170

Always check [www.VaproShield.com](http://www.VaproShield.com) for the latest details and installation instructions