


# Through Wall Shelf Angle Detail with Integrated Field Membrane

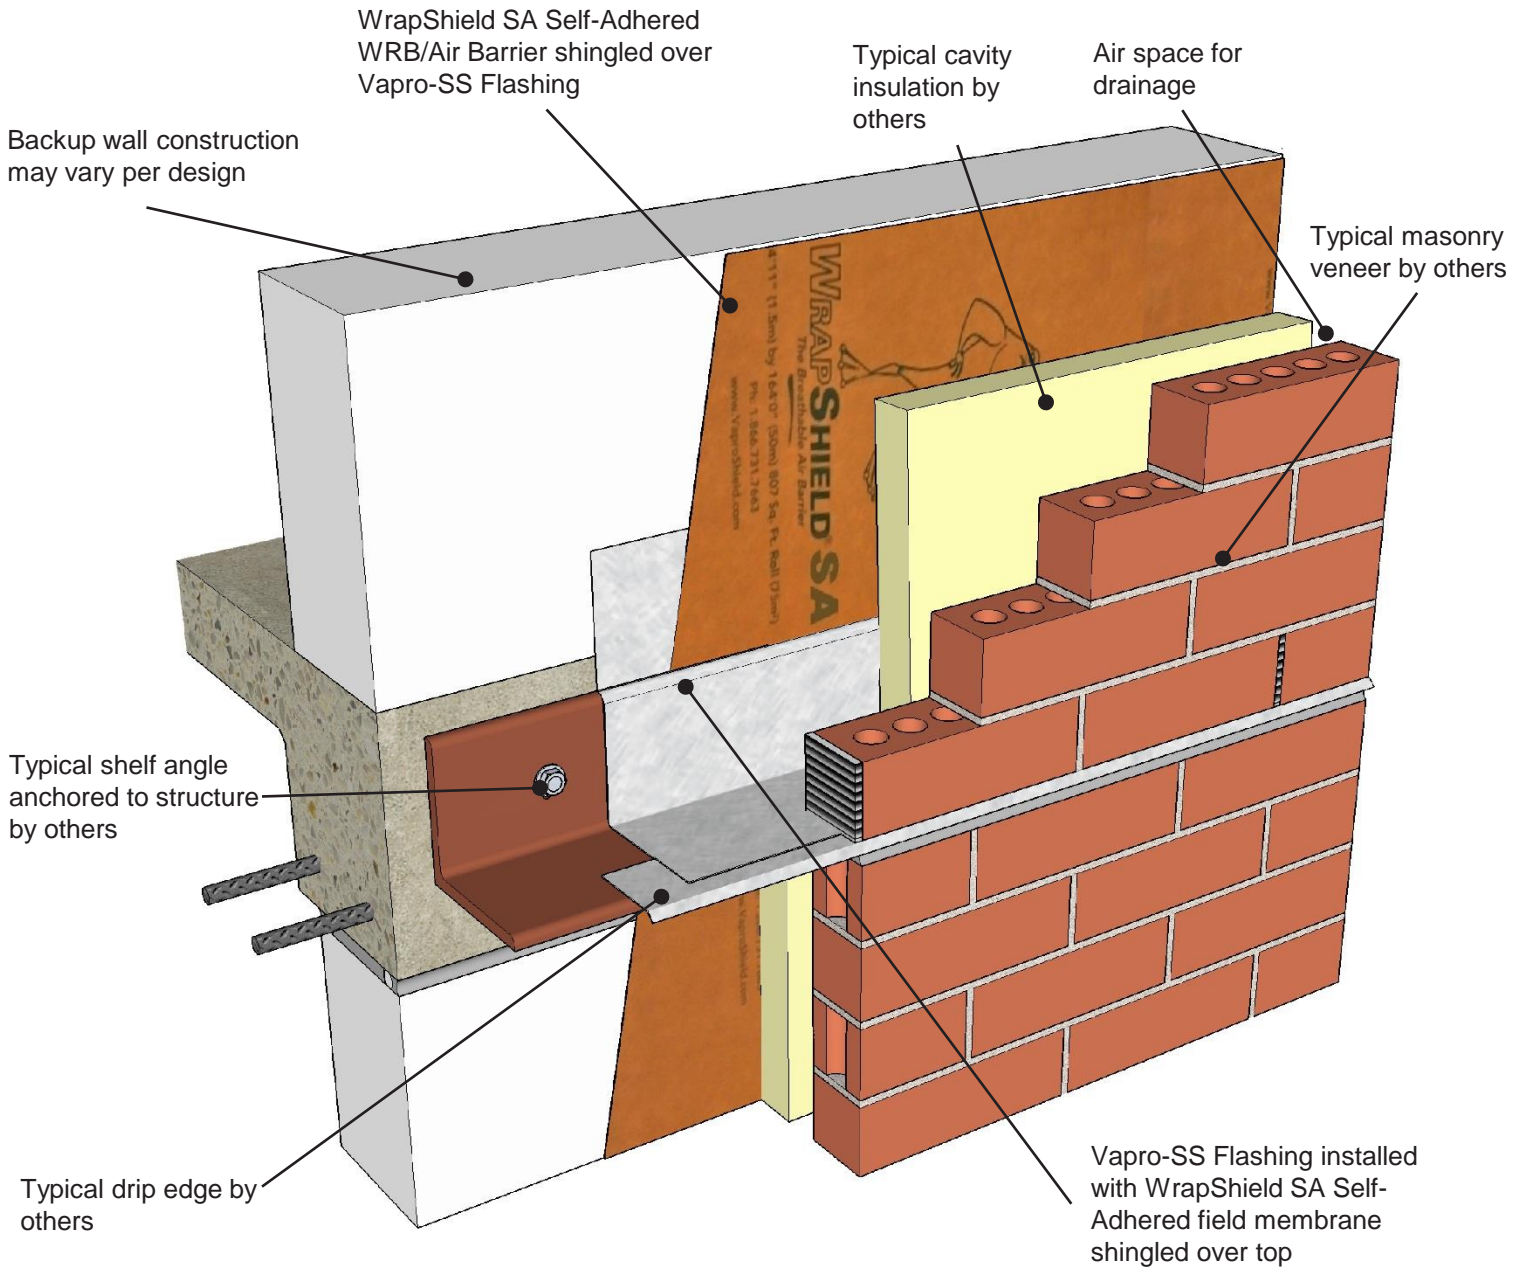

## VAPRO-SS FLASHING<sup>™</sup>

### PRODUCT DESCRIPTION

Vapro-SS Flashing has been designed with a flexible 2 mil sheet of type 304 stainless steel, 8 mils of butyl adhesive and a siliconized release liner. Vapro-SS Flashing is a self-adhering metal flashing that offers best in class puncture and tear resistance. It can be applied from 20°F (-6°C) to 170°F (77°C) and stays stable and air tight from -70°F (21°C) to 200°F (93°C)

### DISCLAIMER

Detail sketch is generic, representing suggested best practices for VaproShield materials, and does not represent a specific job site condition and therefore may not be applicable to certain projects. Detail sketch is designed for use as a reference and must be approved by the designer/consultant of record for each project prior to installation by the subcontractor. Changes and approvals of VaproShield details are the sole responsibility of the designer/consultant of record. VaproShield is **not** the designer of record for building enclosure details and takes no responsibility for the accuracy or interpretation of actual project site conditions.

DRAWN BY: AR

DATE: 03.16.16

REF: 134

Always check [www.VaproShield.com](http://www.VaproShield.com) for the latest details and installation instructions