


Step 1: Window Rough Opening Flashing Sequence

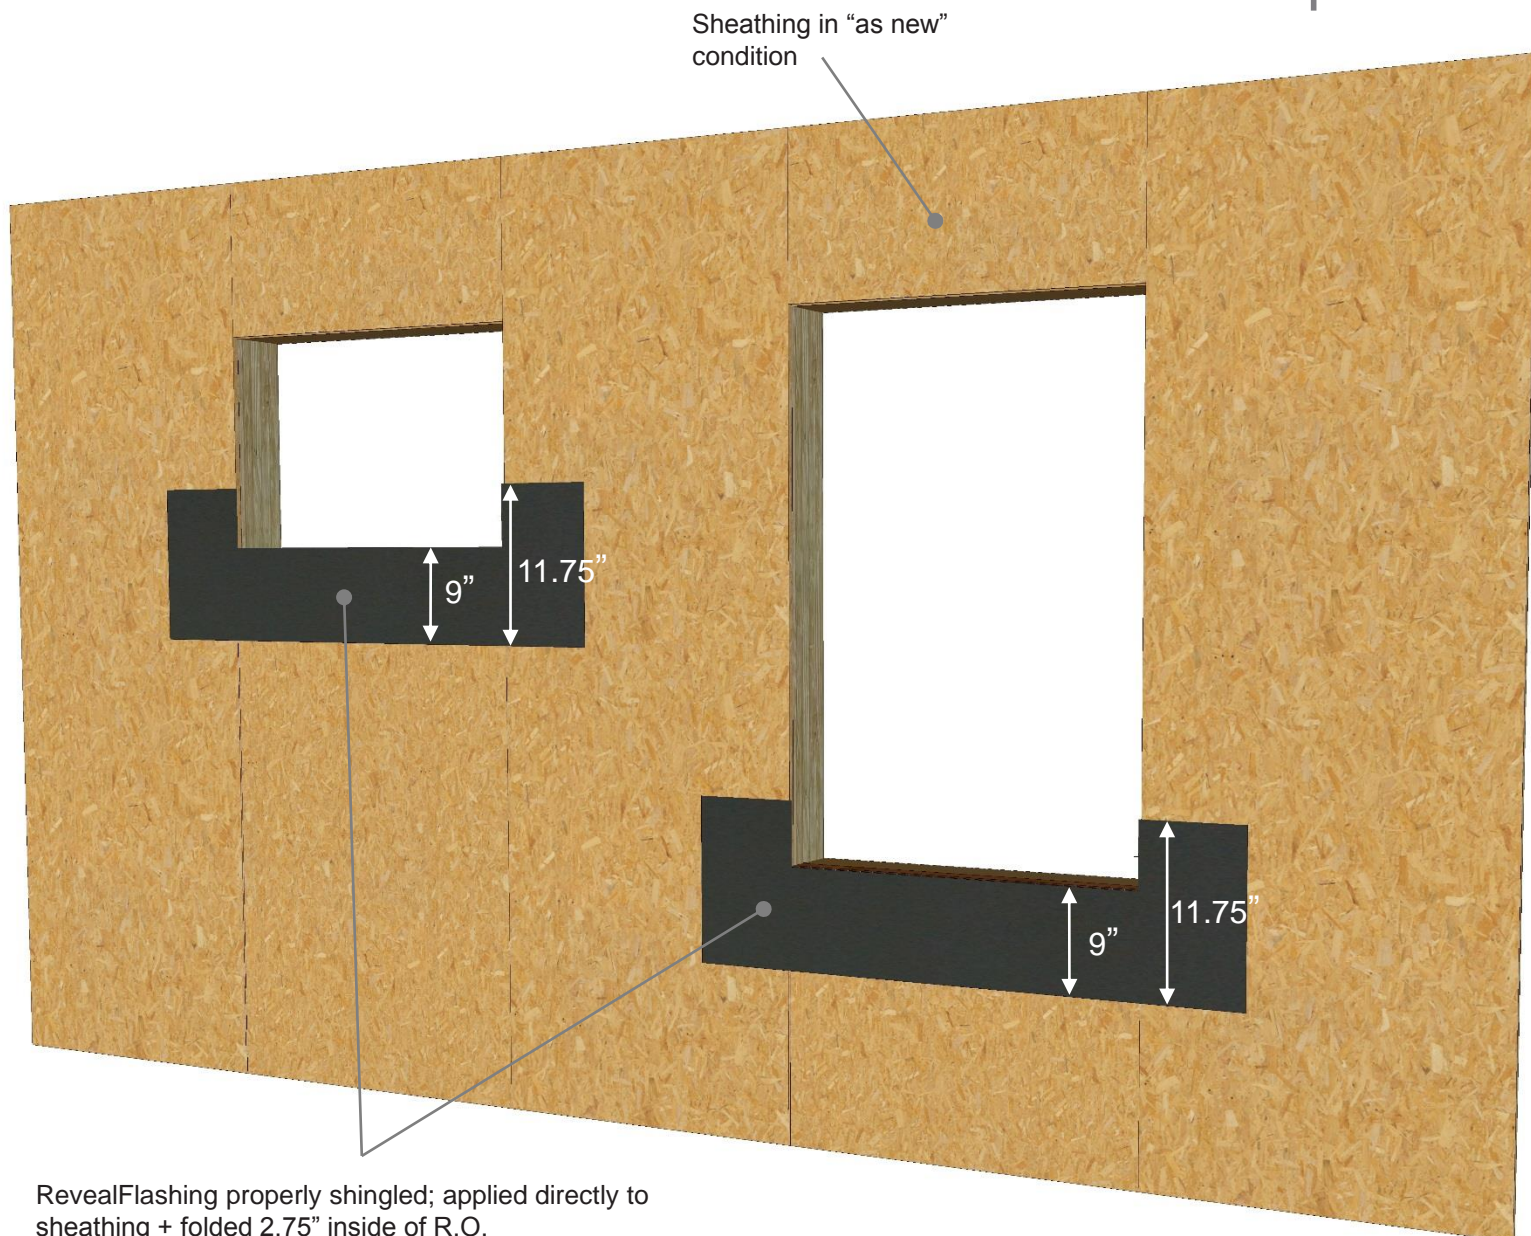

RevealFlashing properly shingled; applied directly to sheathing + folded 2.75" inside of R.O.

Note: Total of 11.75" of flashing should be used:

- 9" of flashing should be left on the face of the sheathing

REVEALSHIELD™ IT

Step 1: Inspect rough opening, Install RevealFlashing to Sill of R.O. with 2.75" folded inside R.O. and 9" left on face.

PRODUCT DESCRIPTION

VaproLiqui-Flash is a liquid applied, vapor permeable, waterproof, air barrier flashing system component for window and door rough openings. VaproLiquiFlash is designed to work with VaproFlashing and VaproShield field membranes as a complete system.

RevealShield IT Integrated Tape is a mechanically attached, vapor permeable, water resistive air barrier membrane with integrated tape at the horizontal seams for use in open joint applications.

DISCLAIMER

Detail sketch is generic, representing suggested best practices for VaproShield materials, and does not represent a specific job site condition and therefore may not be applicable to certain projects. Detail sketch is designed for use as a reference and must be approved by the designer/ consultant of record for each project prior to installation by the subcontractor. Changes and approvals of VaproShield details are the sole responsibility of the designer/consultant of record. VaproShield is **not** the designer of record for building enclosure details and takes no responsibility for the accuracy or interpretation of actual project site conditions.

DRAWN BY: AR

DATE: 06.24.16


REF: 164-1

Always check www.VaproShield.com for the latest details and installation instructions

Step 2: Commercial Window RO Flashing System

RevealFlashing jamb pieces properly shingled, over sill piece and folded 2.75" inside of R.O.

Sheathing in "as new" condition

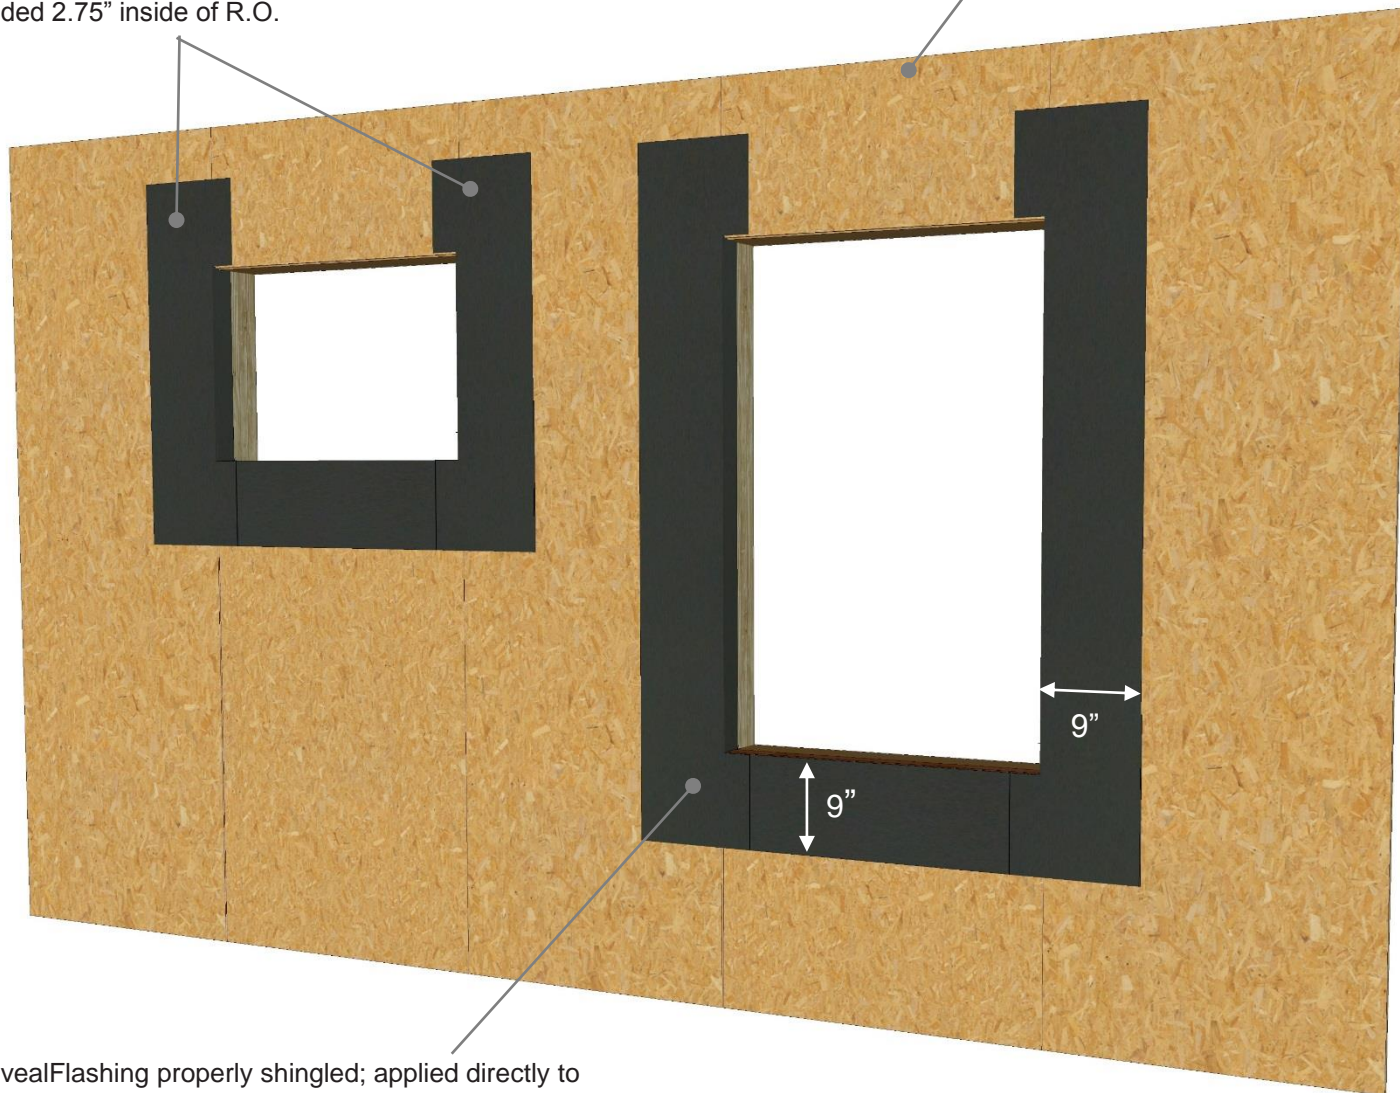

RevealFlashing properly shingled; applied directly to sheathing + folded 2.75" inside of R.O.

Note: Total of 11.75" of flashing should be used:

- 9" of flashing should be left on the face of the sheathing

REVEALSHIELD™ IT

Step 2: Install RevealFlashing to Jambs of R.O. with 2.75" folded inside R.O. and 9" left on face, shingled over Sill piece.

PRODUCT DESCRIPTION

VaproLiqui-Flash is a liquid applied, vapor permeable, waterproof, air barrier flashing system component for window and door rough openings. VaproLiquiFlash is designed to work with VaproFlashing and VaproShield field membranes as a complete system.

RevealShield IT Integrated Tape is a mechanically attached, vapor permeable, water resistive air barrier membrane with integrated tape at the horizontal seams for use in open joint applications.

DISCLAIMER

Detail sketch is generic, representing suggested best practices for VaproShield materials, and does not represent a specific job site condition and therefore may not be applicable to certain projects. Detail sketch is designed for use as a reference and must be approved by the designer/ consultant of record for each project prior to installation by the subcontractor. Changes and approvals of VaproShield details are the sole responsibility of the designer/consultant of record. VaproShield is **not** the designer of record for building enclosure details and takes no responsibility for the accuracy or interpretation of actual project site conditions.


DRAWN BY: AR

DATE: 06.24.16

REF: 164-2

Always check www.VaproShield.com for the latest details and installation instructions

Step 3: Commercial Window RO Flashing System

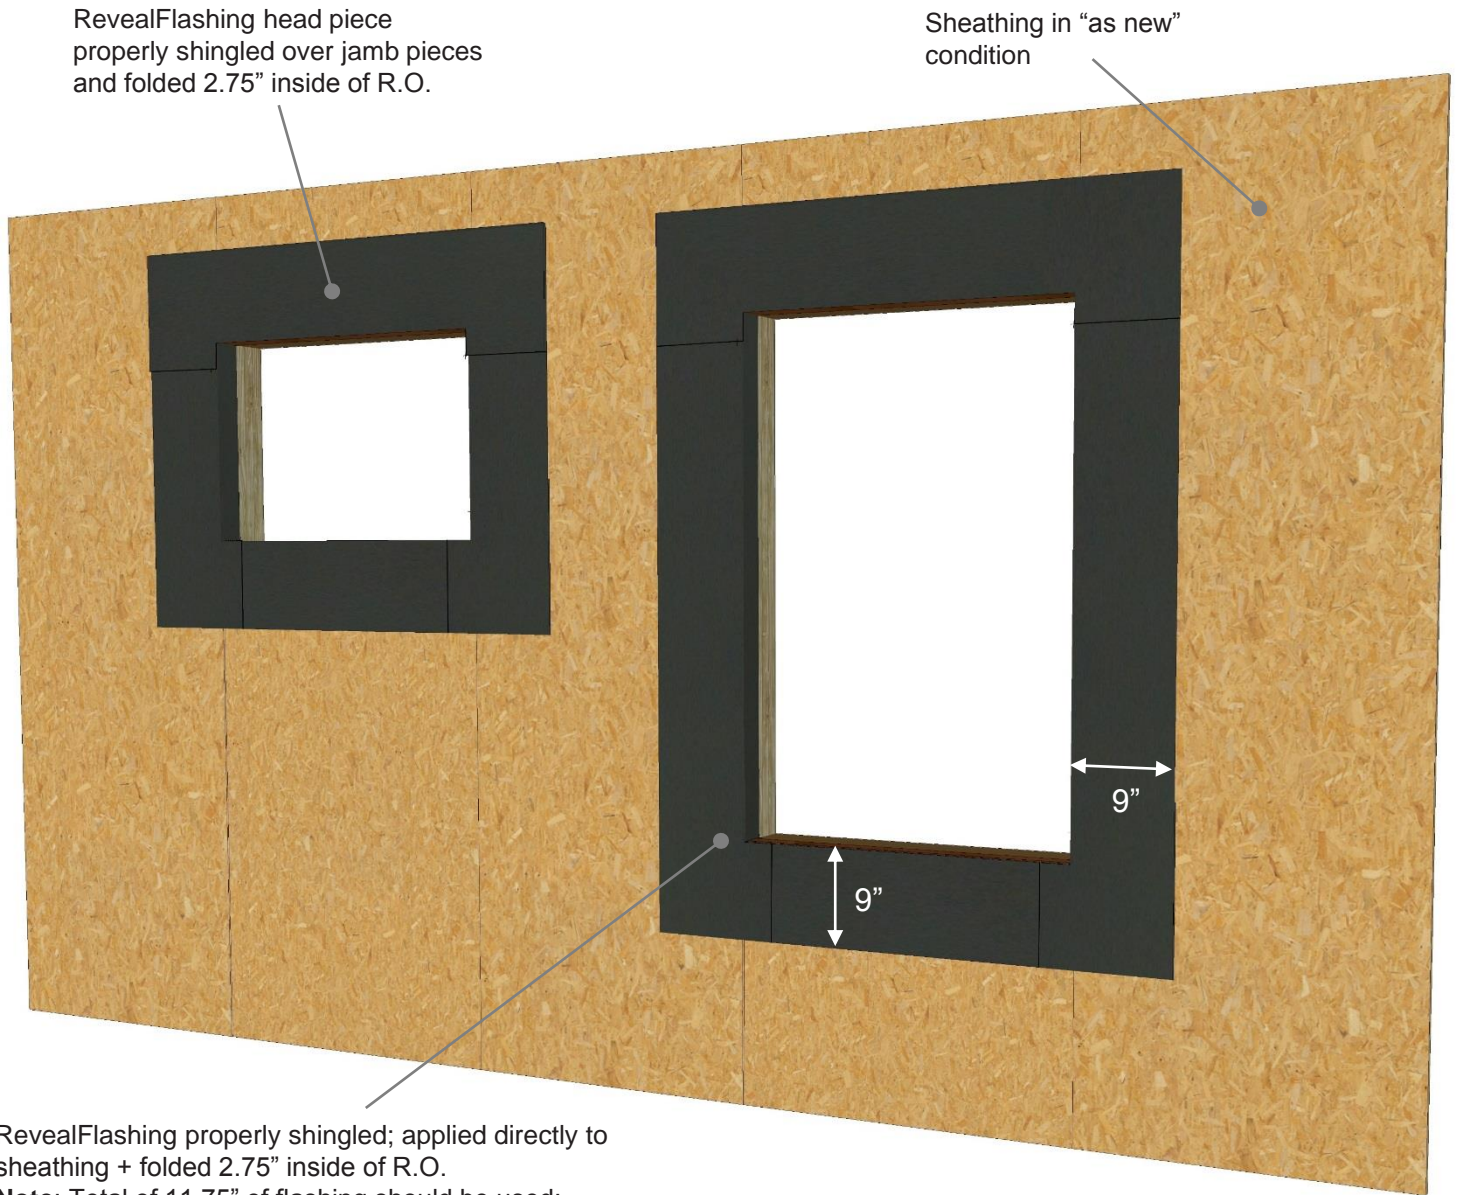

RevealFlashing properly shingled; applied directly to sheathing + folded 2.75" inside of R.O.

Note: Total of 11.75" of flashing should be used:

- 9" of flashing should be left on the face of the sheathing

REVEALSHIELD™ IT

Step 3: Install RevealFlashing to Head of R.O. with 2.75" folded inside R.O. and 9" left on face, shingled over Jamb pieces.

PRODUCT DESCRIPTION

VaproLiqui-Flash is a liquid applied, vapor permeable, waterproof, air barrier flashing system component for window and door rough openings. VaproLiquiFlash is designed to work with VaproFlashing and VaproShield field membranes as a complete system.

RevealShield IT Integrated Tape is a mechanically attached, vapor permeable, water resistive air barrier membrane with integrated tape at the horizontal seams for use in open joint applications.

DISCLAIMER

Detail sketch is generic, representing suggested best practices for VaproShield materials, and does not represent a specific job site condition and therefore may not be applicable to certain projects. Detail sketch is designed for use as a reference and must be approved by the designer/ consultant of record for each project prior to installation by the subcontractor. Changes and approvals of VaproShield details are the sole responsibility of the designer/consultant of record. VaproShield is **not** the designer of record for building enclosure details and takes no responsibility for the accuracy or interpretation of actual project site conditions.


DRAWN BY: AR

DATE: 06.24.16

REF: 164-3

Always check www.VaproShield.com for the latest details and installation instructions

Step 4: Commercial Window RO Flashing System

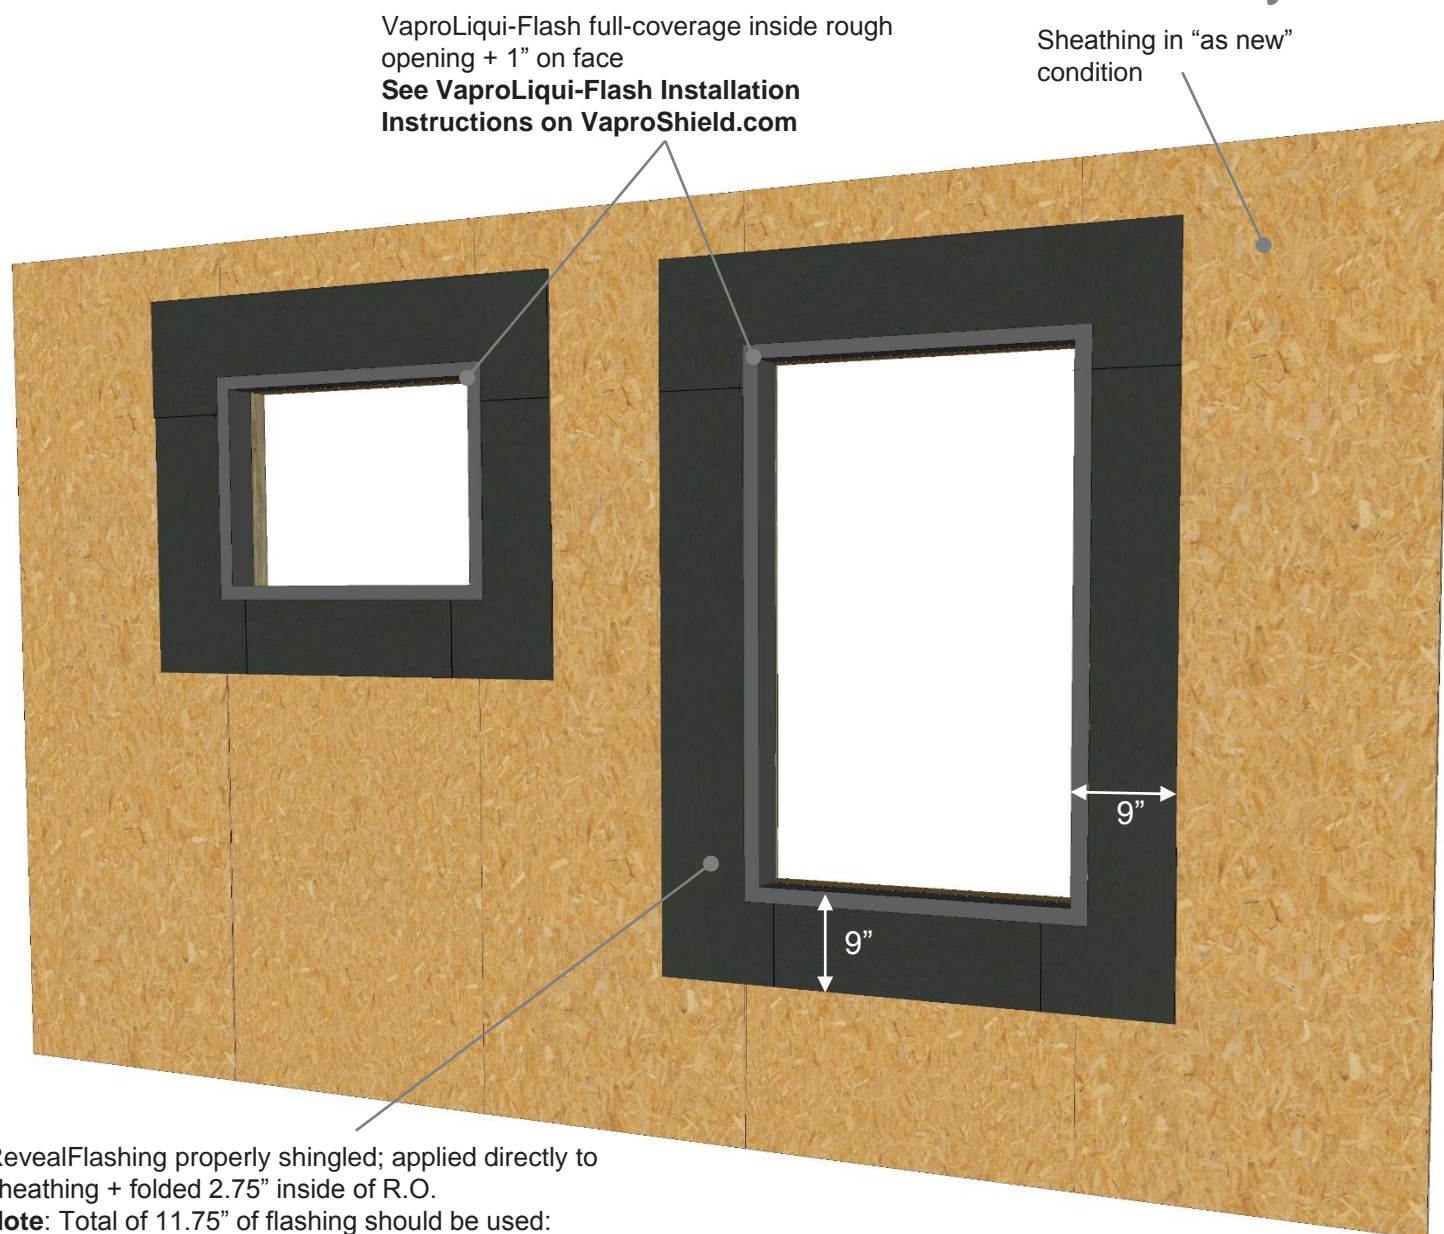

RevealFlashing properly shingled; applied directly to sheathing + folded 2.75" inside of R.O.

Note: Total of 11.75" of flashing should be used:

- 9" of flashing should be left on the face of the sheathing

Step 4: Apply VaproLiqui-Flash to inside of R.O. (full coverage) and 1" on face. Refer to VaproLiqui-Flash Installation page on VaproShield.com.
VaproShield.com/products/window-flashing-elements/vaproliqui-flash/installation

PRODUCT DESCRIPTION

VaproLiqui-Flash is a liquid applied, vapor permeable, waterproof, air barrier flashing system component for window and door rough openings. VaproLiquiFlash is designed to work with VaproFlashing and VaproShield field membranes as a complete system.

RevealShield IT Integrated Tape is a mechanically attached, vapor permeable, water resistive air barrier membrane with integrated tape at the horizontal seams for use in open joint applications.

DISCLAIMER

Detail sketch is generic, representing suggested best practices for VaproShield materials, and does not represent a specific job site condition and therefore may not be applicable to certain projects. Detail sketch is designed for use as a reference and must be approved by the designer/ consultant of record for each project prior to installation by the subcontractor. Changes and approvals of VaproShield details are the sole responsibility of the designer/consultant of record. VaproShield is **not** the designer of record for building enclosure details and takes no responsibility for the accuracy or interpretation of actual project site conditions.


DRAWN BY: AR

DATE: 06.24.16

REF: 164-4

Always check www.VaproShield.com for the latest details and installation instructions

Step 5: Commercial Window RO Flashing System

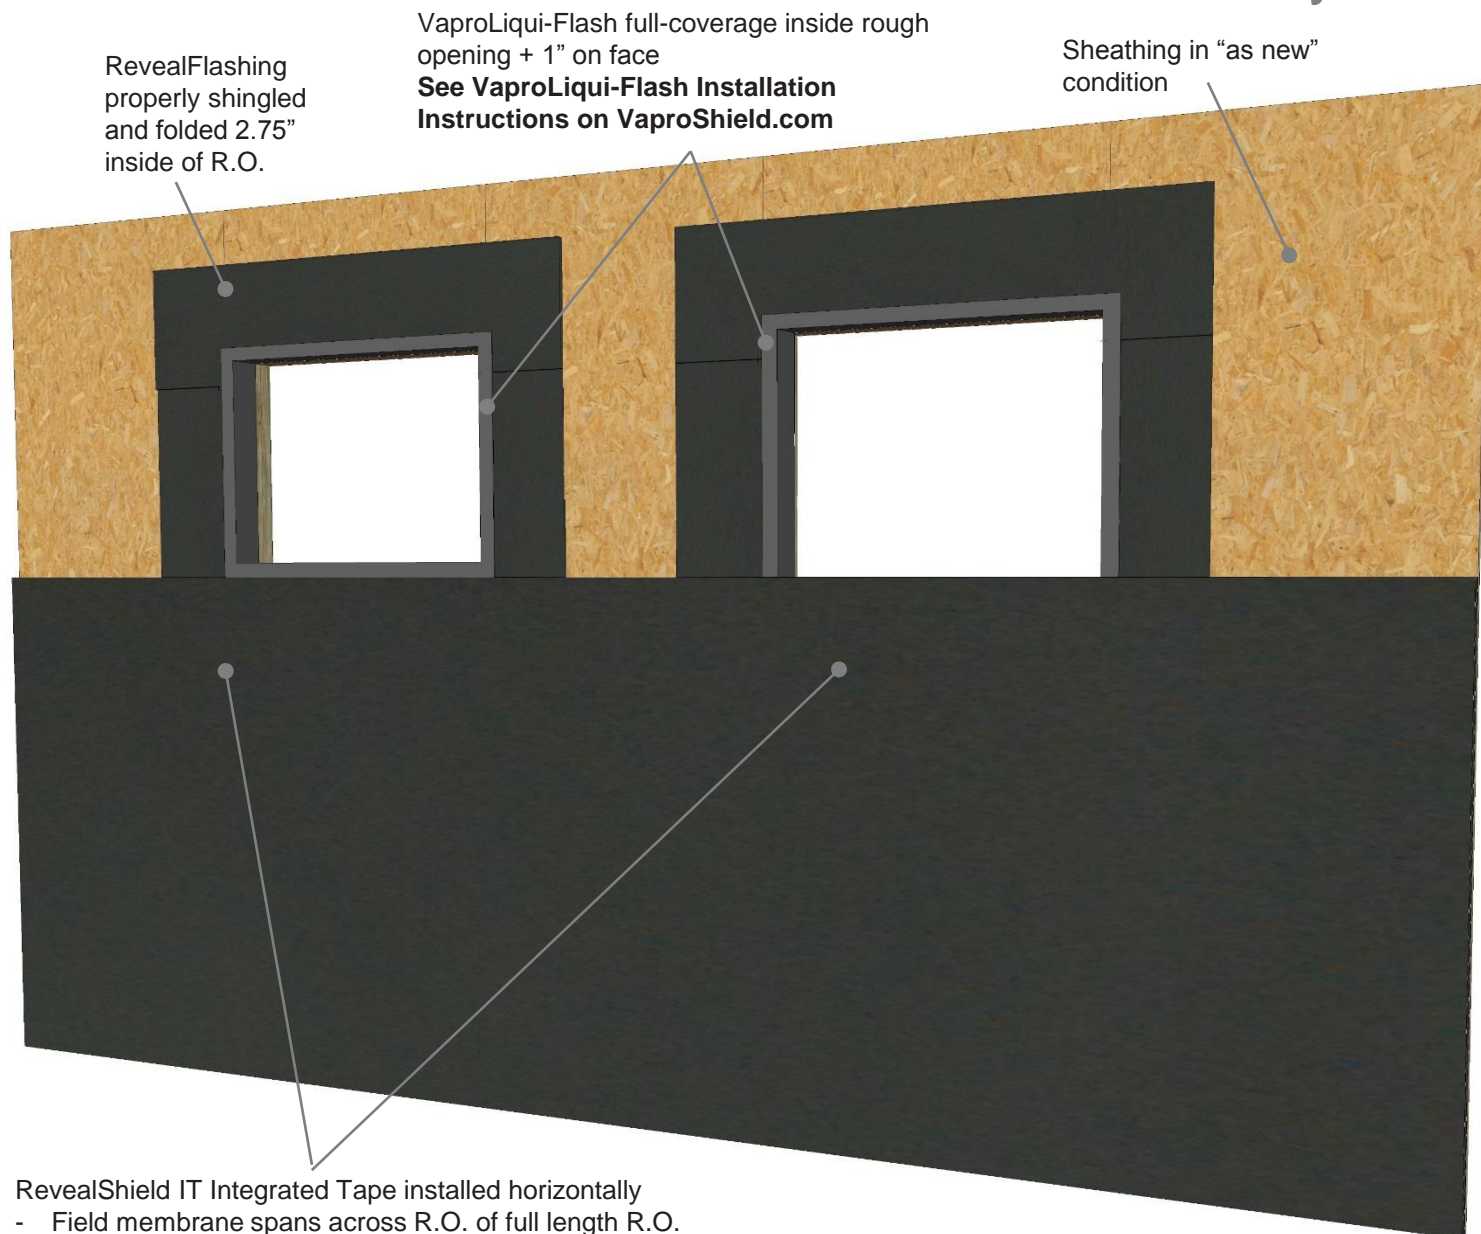

REVEALSHIELD™ IT

Step 5: Install field membrane horizontally, lining up with bottom edge of VaproLiqui-Flash or spanning across rough opening

PRODUCT DESCRIPTION

VaproLiqui-Flash is a liquid applied, vapor permeable, waterproof, air barrier flashing system component for window and door rough openings. VaproLiquiFlash is designed to work with VaproFlashing and VaproShield field membranes as a complete system.

RevealShield IT Integrated Tape is a mechanically attached, vapor permeable, water resistive air barrier membrane with integrated tape at the horizontal seams for use in open joint applications.

DISCLAIMER

Detail sketch is generic, representing suggested best practices for VaproShield materials, and does not represent a specific job site condition and therefore may not be applicable to certain projects. Detail sketch is designed for use as a reference and must be approved by the designer/ consultant of record for each project prior to installation by the subcontractor. Changes and approvals of VaproShield details are the sole responsibility of the designer/consultant of record. VaproShield is **not** the designer of record for building enclosure details and takes no responsibility for the accuracy or interpretation of actual project site conditions.


DRAWN BY: AR

DATE: 06.24.16

REF: 164-5

Always check www.VaproShield.com for the latest details and installation instructions

Step 6: Commercial Window RO Flashing System

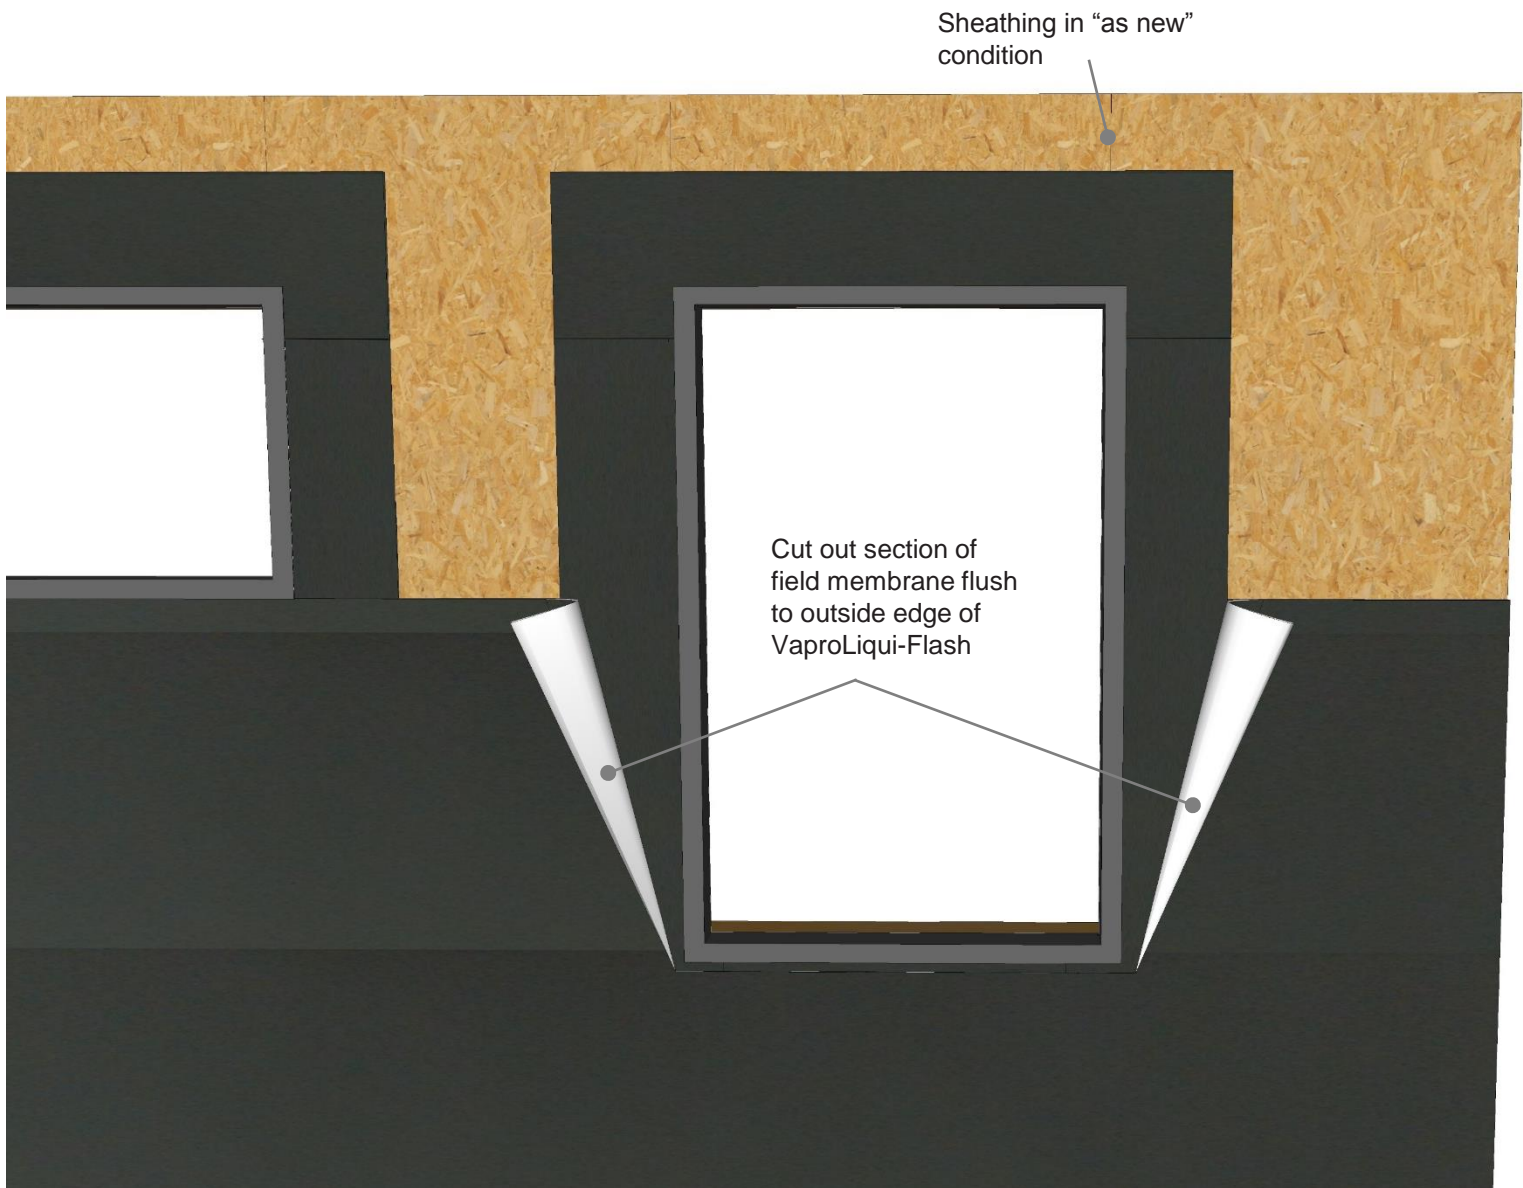

REVEALSHIELD™ IT

Step 6: Cut out section of field membrane to expose covered rough opening and 1" of VaproLiqui-Flash on face

PRODUCT DESCRIPTION

VaproLiqui-Flash is a liquid applied, vapor permeable, waterproof, air barrier flashing system component for window and door rough openings. VaproLiquiFlash is designed to work with VaproFlashing and VaproShield field membranes as a complete system.

RevealShield IT Integrated Tape is a mechanically attached, vapor permeable, water resistive air barrier membrane with integrated tape at the horizontal seams for use in open joint applications.

DISCLAIMER

Detail sketch is generic, representing suggested best practices for VaproShield materials, and does not represent a specific job site condition and therefore may not be applicable to certain projects. Detail sketch is designed for use as a reference and must be approved by the designer/ consultant of record for each project prior to installation by the subcontractor. Changes and approvals of VaproShield details are the sole responsibility of the designer/consultant of record. VaproShield is **not** the designer of record for building enclosure details and takes no responsibility for the accuracy or interpretation of actual project site conditions.

DRAWN BY: AR

DATE: 06.24.16


REF: 164-6

Always check www.VaproShield.com for the latest details and installation instructions

Step 7: Commercial Window RO Flashing System

VaproLiqui-Flash full-coverage inside rough opening + 1" on face
See VaproLiqui-Flash Installation Instructions on VaproShield.com

Sheathing in "as new" condition

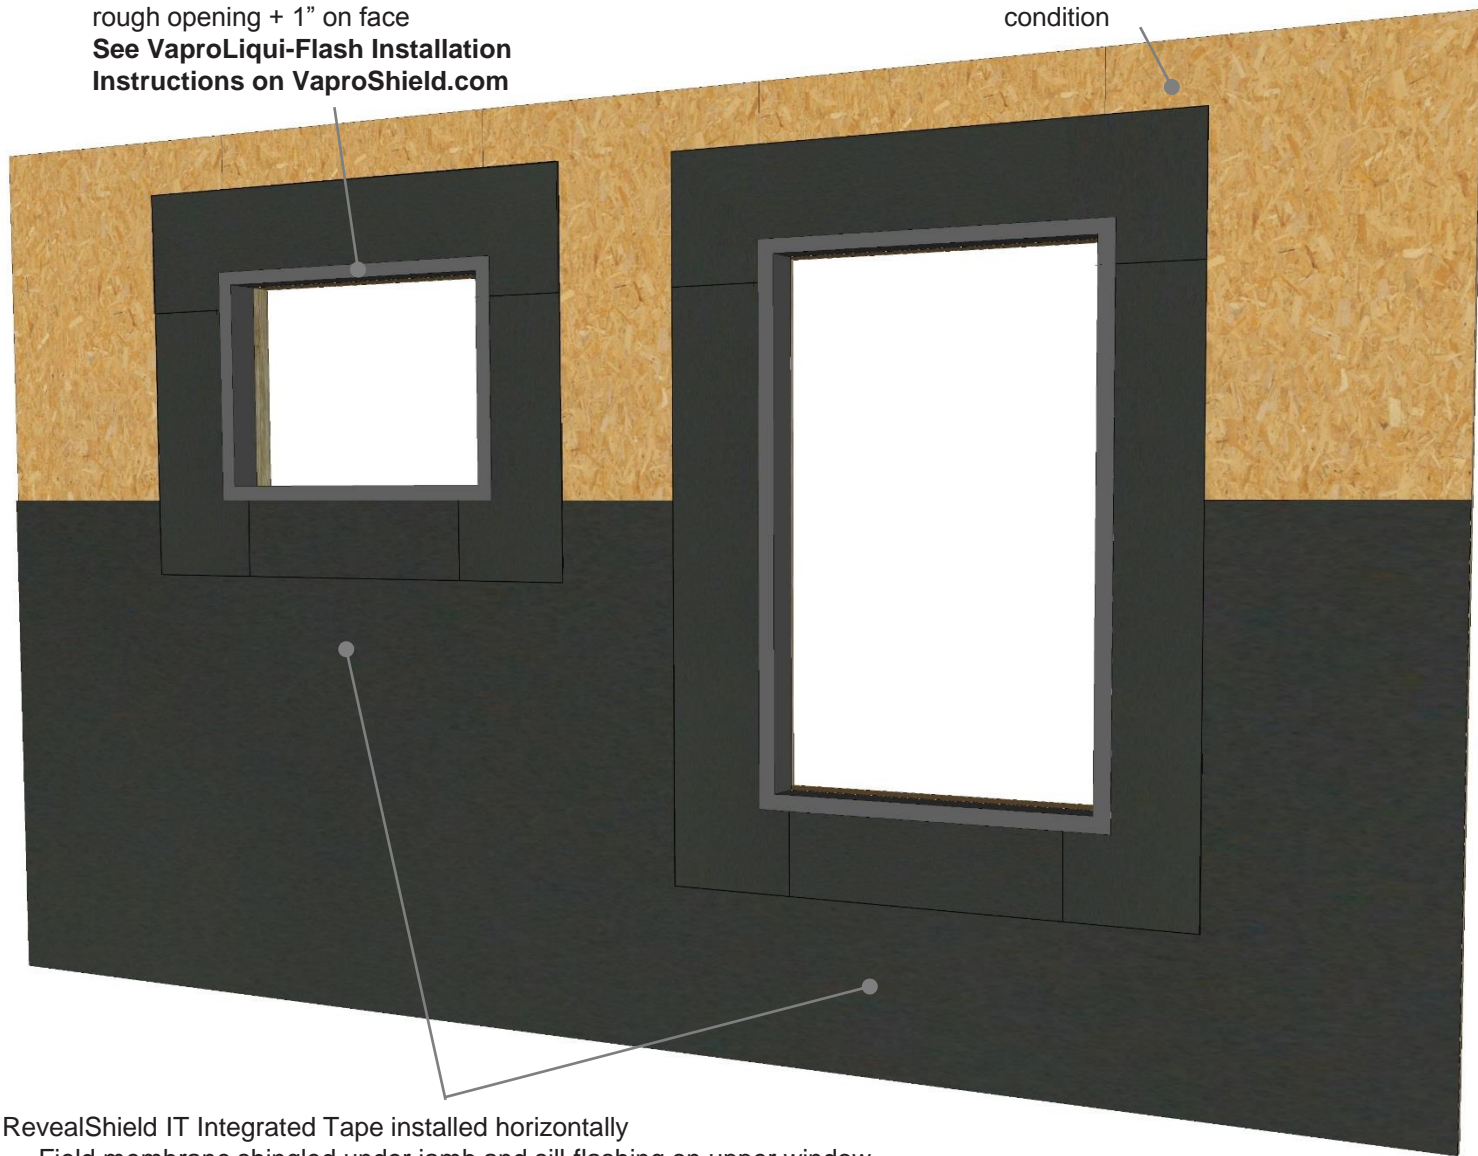

RevealShield IT Integrated Tape installed horizontally

- Field membrane shingled under jamb and sill flashing on upper window
- Field membrane with R.O. section cut out shingled under jamb and sill flashing

REVEALSHIELD™ IT

Step 7: Shingle field membrane under RevealFlashing sill and jamb pieces.

PRODUCT DESCRIPTION

VaproLiqui-Flash is a liquid applied, vapor permeable, waterproof, air barrier flashing system component for window and door rough openings. VaproLiquiFlash is designed to work with VaproFlashing and VaproShield field membranes as a complete system.

RevealShield IT Integrated Tape is a mechanically attached, vapor permeable, water resistive air barrier membrane with integrated tape at the horizontal seams for use in open joint applications.

DISCLAIMER

Detail sketch is generic, representing suggested best practices for VaproShield materials, and does not represent a specific job site condition and therefore may not be applicable to certain projects. Detail sketch is designed for use as a reference and must be approved by the designer/ consultant of record for each project prior to installation by the subcontractor. Changes and approvals of VaproShield details are the sole responsibility of the designer/consultant of record. VaproShield is **not** the designer of record for building enclosure details and takes no responsibility for the accuracy or interpretation of actual project site conditions.

DRAWN BY: AR

DATE: 06.24.16

REF: 164-7


Always check www.VaproShield.com for the latest details and installation instructions

Step 8: Commercial Window RO Flashing System

VaproLiqui-Flash full-coverage inside rough opening + 1" on face
See VaproLiqui-Flash Installation Instructions on VaproShield.com

RevealShield IT Integrated Tape installed horizontally

- Field membrane cut flush with edge of R.O.
- **Left unattached until window and head flashing are installed**

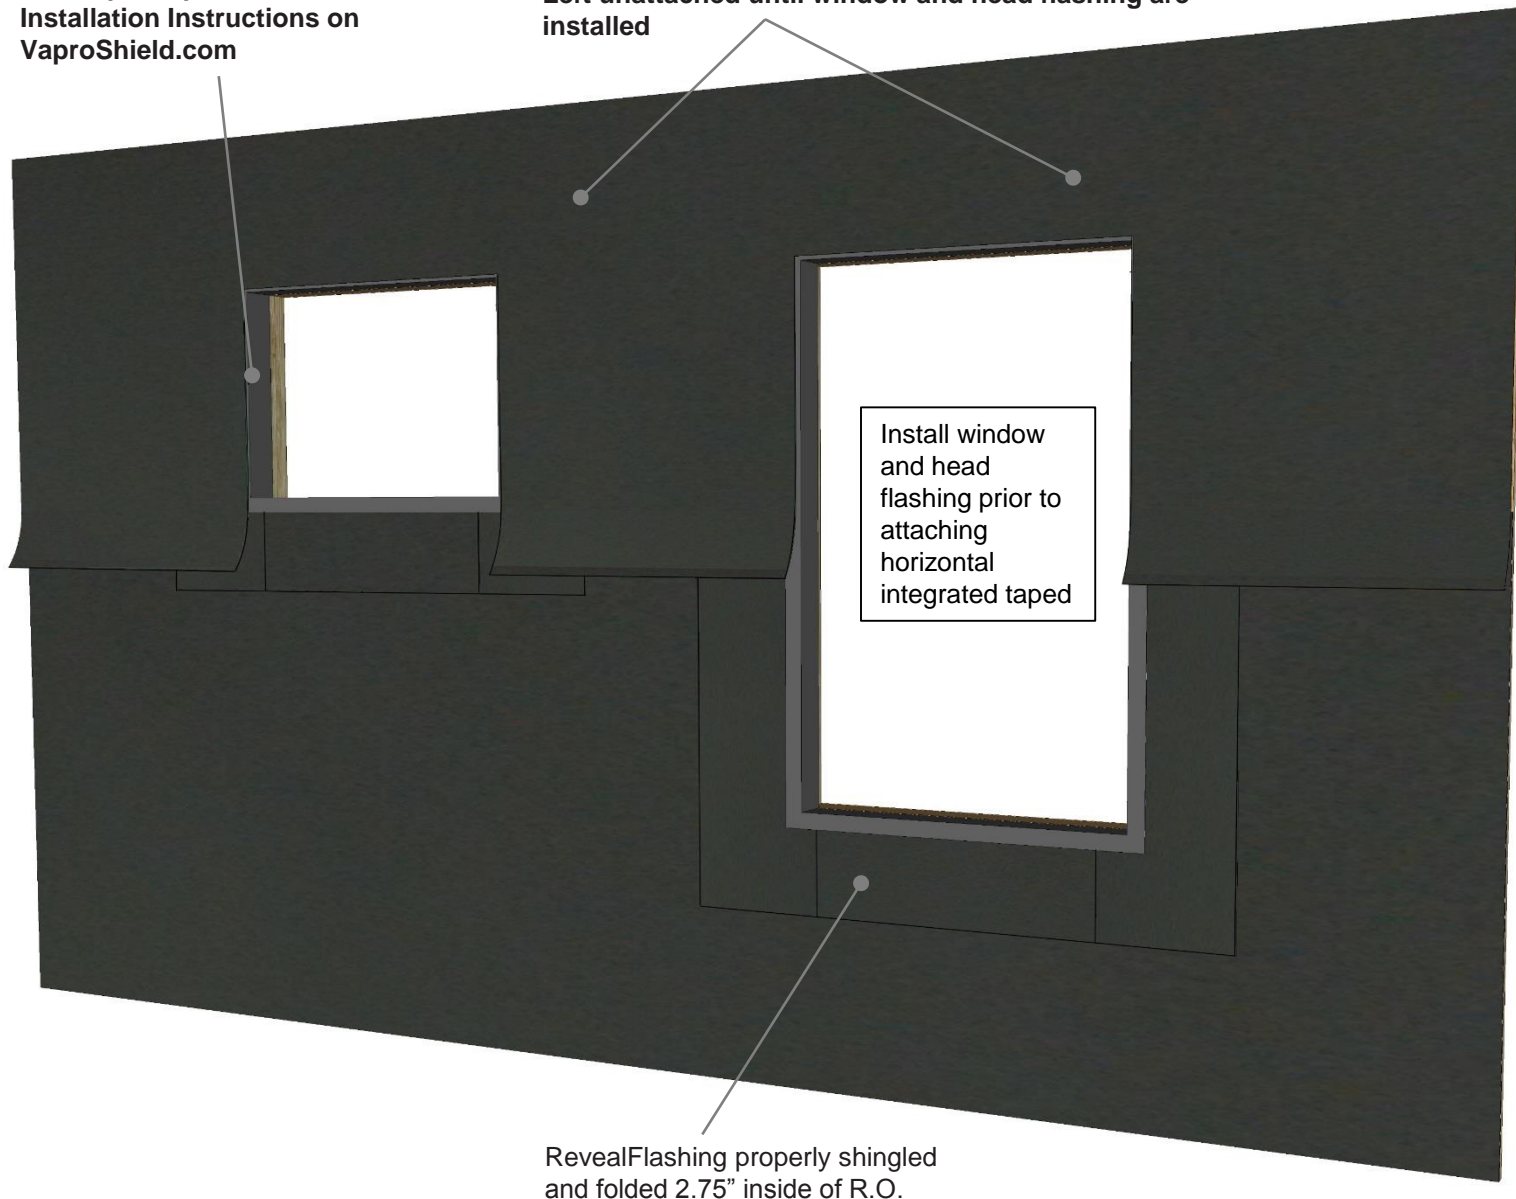

REVEALSHIELD™ IT

Step 8: Install field membrane horizontally, lining up integrated tape seams. Rough openings should be cut out, with VaproLiqui-Flash covered.

PRODUCT DESCRIPTION

VaproLiqui-Flash is a liquid applied, vapor permeable, waterproof, air barrier flashing system component for window and door rough openings. VaproLiquiFlash is designed to work with VaproFlashing and VaproShield field membranes as a complete system.

RevealShield IT Integrated Tape is a mechanically attached, vapor permeable, water resistive air barrier membrane with integrated tape at the horizontal seams for use in open joint applications.

DISCLAIMER

Detail sketch is generic, representing suggested best practices for VaproShield materials, and does not represent a specific job site condition and therefore may not be applicable to certain projects. Detail sketch is designed for use as a reference and must be approved by the designer/ consultant of record for each project prior to installation by the subcontractor. Changes and approvals of VaproShield details are the sole responsibility of the designer/consultant of record. VaproShield is **not** the designer of record for building enclosure details and takes no responsibility for the accuracy or interpretation of actual project site conditions.

DRAWN BY: AR

DATE: 06.24.16

REF: 164-8

Always check www.VaproShield.com for the latest details and installation instructions