


Rough Opening Flashing Sequence Step 1

Sheathing in "as new"
condition

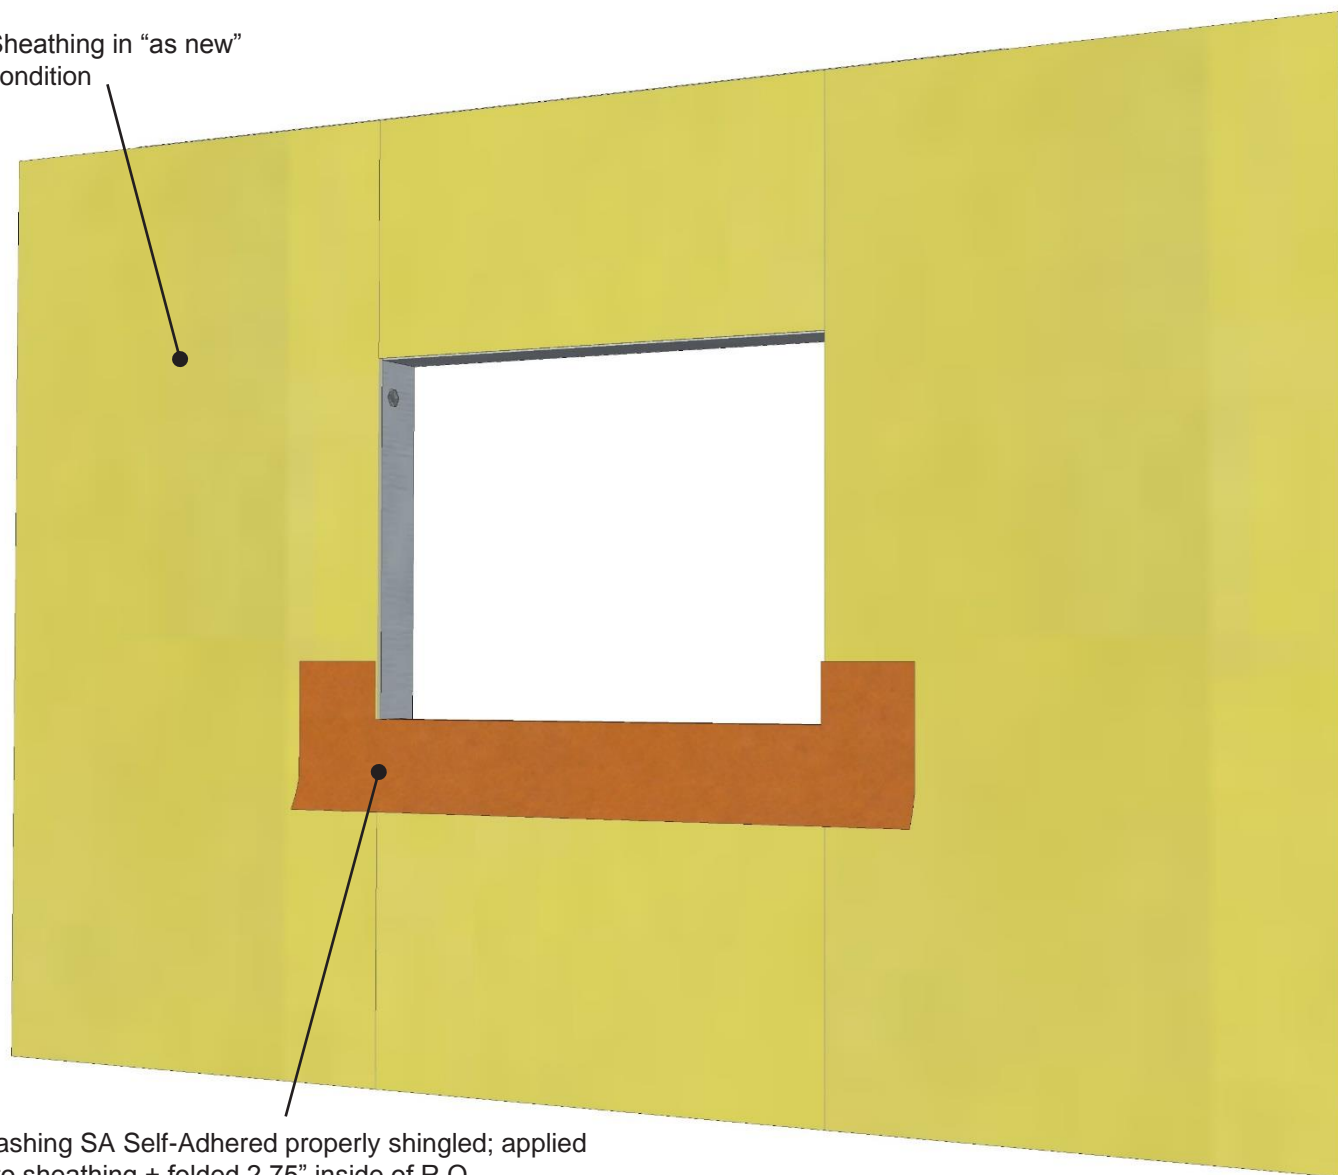

VaproFlashing SA Self-Adhered properly shingled; applied directly to sheathing + folded 2.75" inside of R.O.

Note: Total of 11.75" of flashing should be used:

- 9" of flashing should be left on the face of the sheathing
- 6" of release film from the bottom of the flashing to be left attached for shingling over membrane.

VAPRO-SS FLASHING™

Step 1: Install VaproFlashing SA into sill with 2.75" folded into R.O. 9" left on face, with bottom 6" of release film to remain attached.

PRODUCT DESCRIPTION

Vapro-SS Flashing has been designed with a flexible 2 mil sheet of type 304 stainless steel, 8 mils of butyl adhesive and a siliconized release liner. Vapro-SS Flashing is a self-adhering metal flashing that offers best in class puncture and tear resistance. It can be applied from 20°F (-6°C) to 170°F (77°C) and stays stable and air tight from -70°F (21°C) to 200°F (93°C)

DISCLAIMER

Detail sketch is generic, representing suggested best practices for VaproShield materials, and does not represent a specific job site condition and therefore may not be applicable to certain projects. Detail sketch is designed for use as a reference and must be approved by the designer/ consultant of record for each project prior to installation by the subcontractor. Changes and approvals of VaproShield details are the sole responsibility of the designer/consultant of record. VaproShield is **not** the designer of record for building enclosure details and takes no responsibility for the accuracy or interpretation of actual project site conditions.

DRAWN BY: AR


DATE: 05.05.16

REF: 138-1

Always check www.VaproShield.com for the latest details and installation instructions

Rough Opening Flashing Sequence Step 2

Sheathing in "as new" condition

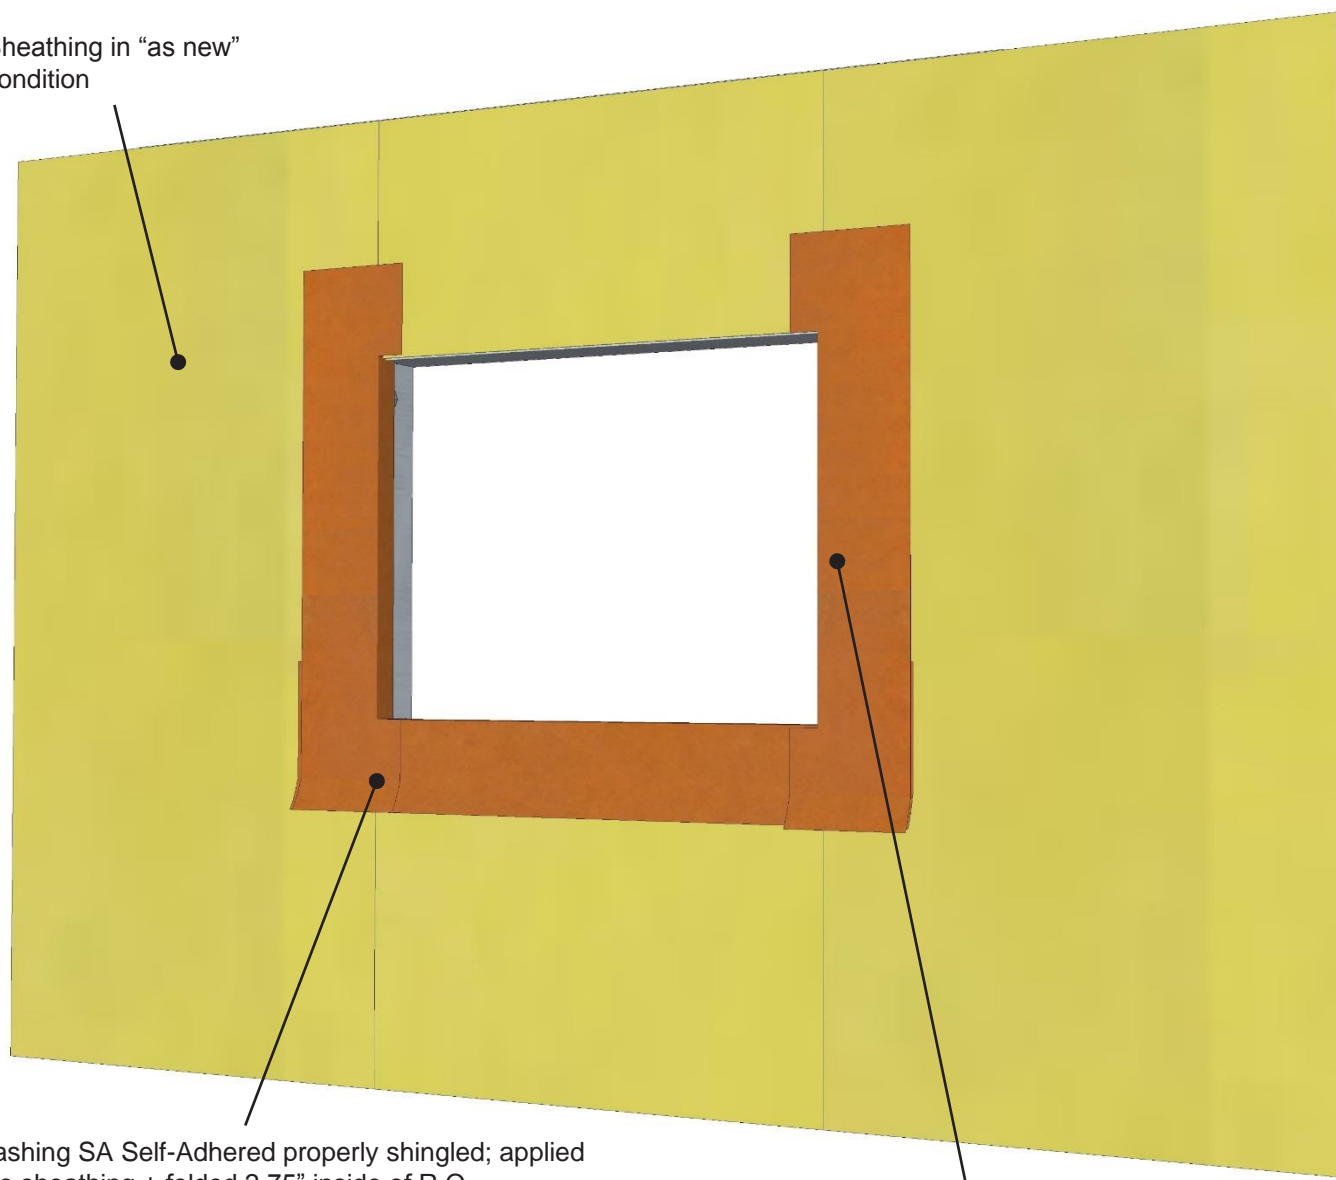

VaproFlashing SA Self-Adhered properly shingled; applied directly to sheathing + folded 2.75" inside of R.O.

Note: Total of 11.75" of flashing should be used:

- 9" of flashing should be left on the face of the sheathing
- 6" of release film from the bottom of the flashing to be left attached for shingling over membrane.

VaproFlashing SA Jamb Pieces applied directly to sheathing + folded 2.75" inside R.O.

VAPRO-SS FLASHING™

Step 2: Install jamb pieces with 2.75" folded into R.O. 9" to be left on face.

PRODUCT DESCRIPTION

Vapro-SS Flashing has been designed with a flexible 2 mil sheet of type 304 stainless steel, 8 mils of butyl adhesive and a siliconized release liner. Vapro-SS Flashing is a self-adhering metal flashing that offers best in class puncture and tear resistance. It can be applied from 20°F (-6°C) to 170°F (77°C) and stays stable and air tight from -70°F (21°C) to 200°F (93°C)

DISCLAIMER

Detail sketch is generic, representing suggested best practices for VaproShield materials, and does not represent a specific job site condition and therefore may not be applicable to certain projects. Detail sketch is designed for use as a reference and must be approved by the designer/ consultant of record for each project prior to installation by the subcontractor. Changes and approvals of VaproShield details are the sole responsibility of the designer/consultant of record. VaproShield is **not** the designer of record for building enclosure details and takes no responsibility for the accuracy or interpretation of actual project site conditions.


DRAWN BY: AR

DATE: 05.05.16

REF: 138-2

Always check www.VaproShield.com for the latest details and installation instructions

Rough Opening Flashing Sequence Step 3

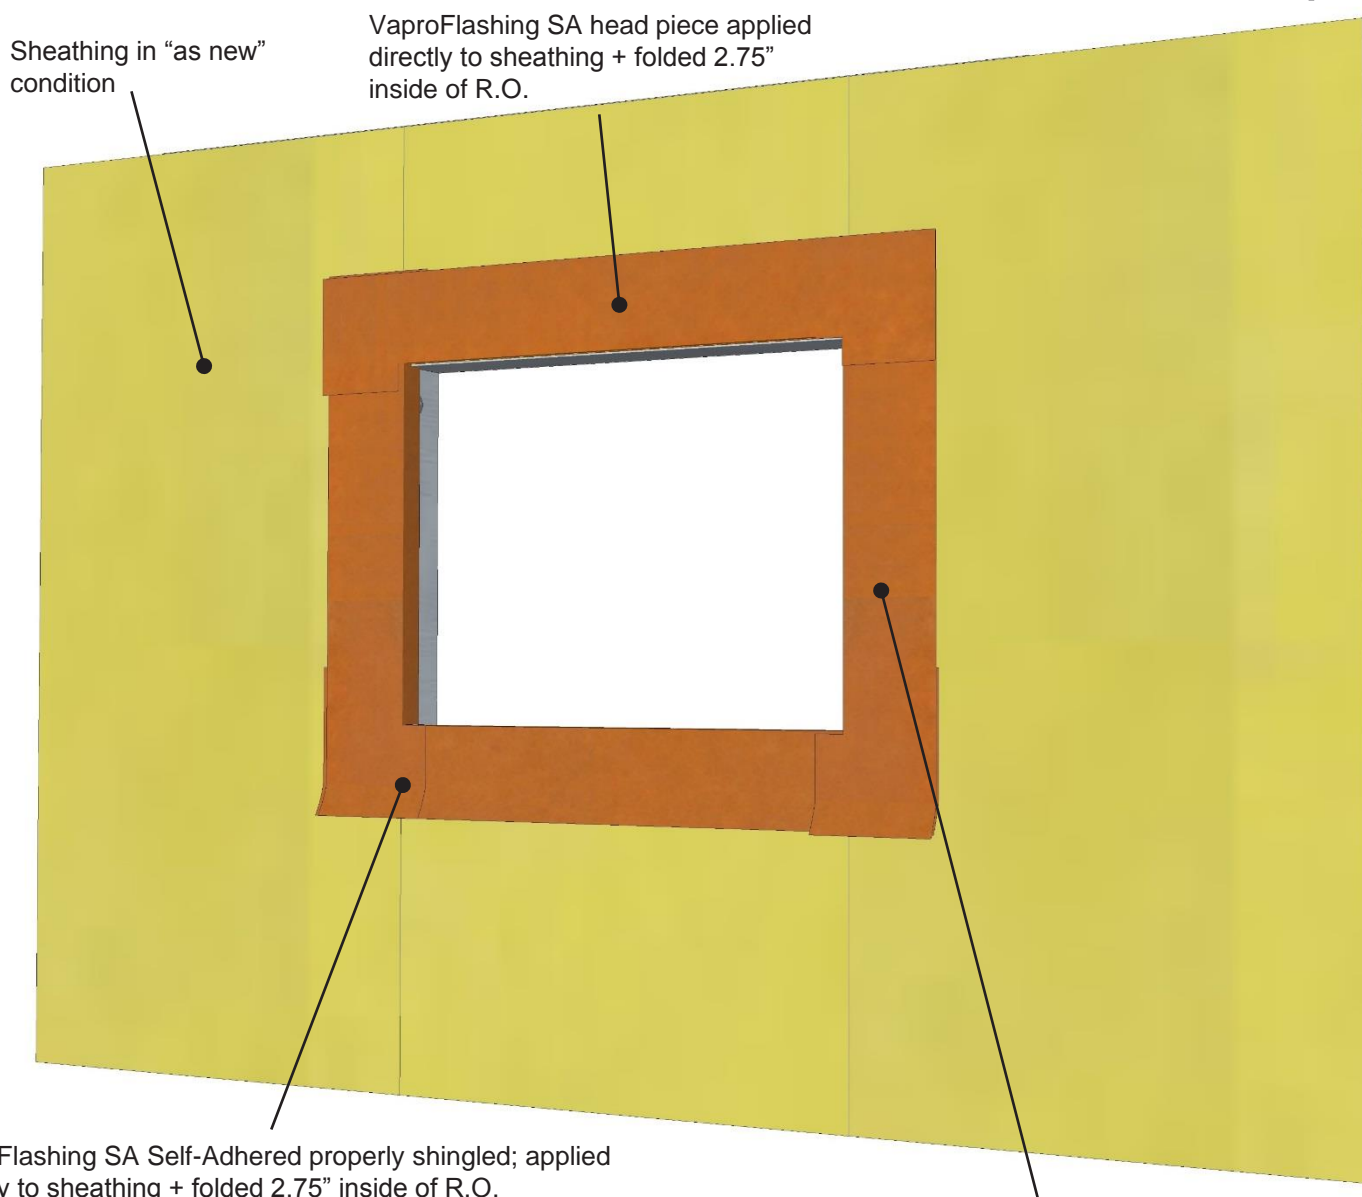

VaproFlashing SA Self-Adhered properly shingled; applied directly to sheathing + folded 2.75" inside of R.O.

Note: Total of 11.75" of flashing should be used:

- 9" of flashing should be left on the face of the sheathing
- 6" of release film from the bottom of the flashing to be left attached for shingling over membrane.

VaproFlashing SA Jamb Pieces applied directly to sheathing + folded 2.75" inside R.O.

VAPRO-SS FLASHING™

Step 3: Install head piece with 2.75" folded into R.O. 9" to be left on face.

PRODUCT DESCRIPTION

Vapro-SS Flashing has been designed with a flexible 2 mil sheet of type 304 stainless steel, 8 mils of butyl adhesive and a siliconized release liner. Vapro-SS Flashing is a self-adhering metal flashing that offers best in class puncture and tear resistance. It can be applied from 20°F (-6°C) to 170°F (77°C) and stays stable and air tight from -70°F (21°C) to 200°F (93°C)

DISCLAIMER

Detail sketch is generic, representing suggested best practices for VaproShield materials, and does not represent a specific job site condition and therefore may not be applicable to certain projects. Detail sketch is designed for use as a reference and must be approved by the designer/ consultant of record for each project prior to installation by the subcontractor. Changes and approvals of VaproShield details are the sole responsibility of the designer/consultant of record. VaproShield is **not** the designer of record for building enclosure details and takes no responsibility for the accuracy or interpretation of actual project site conditions.


DRAWN BY: AR

DATE: 05.05.16

REF: 138-3

Always check www.VaproShield.com for the latest details and installation instructions

Rough Opening Flashing Sequence Step 4

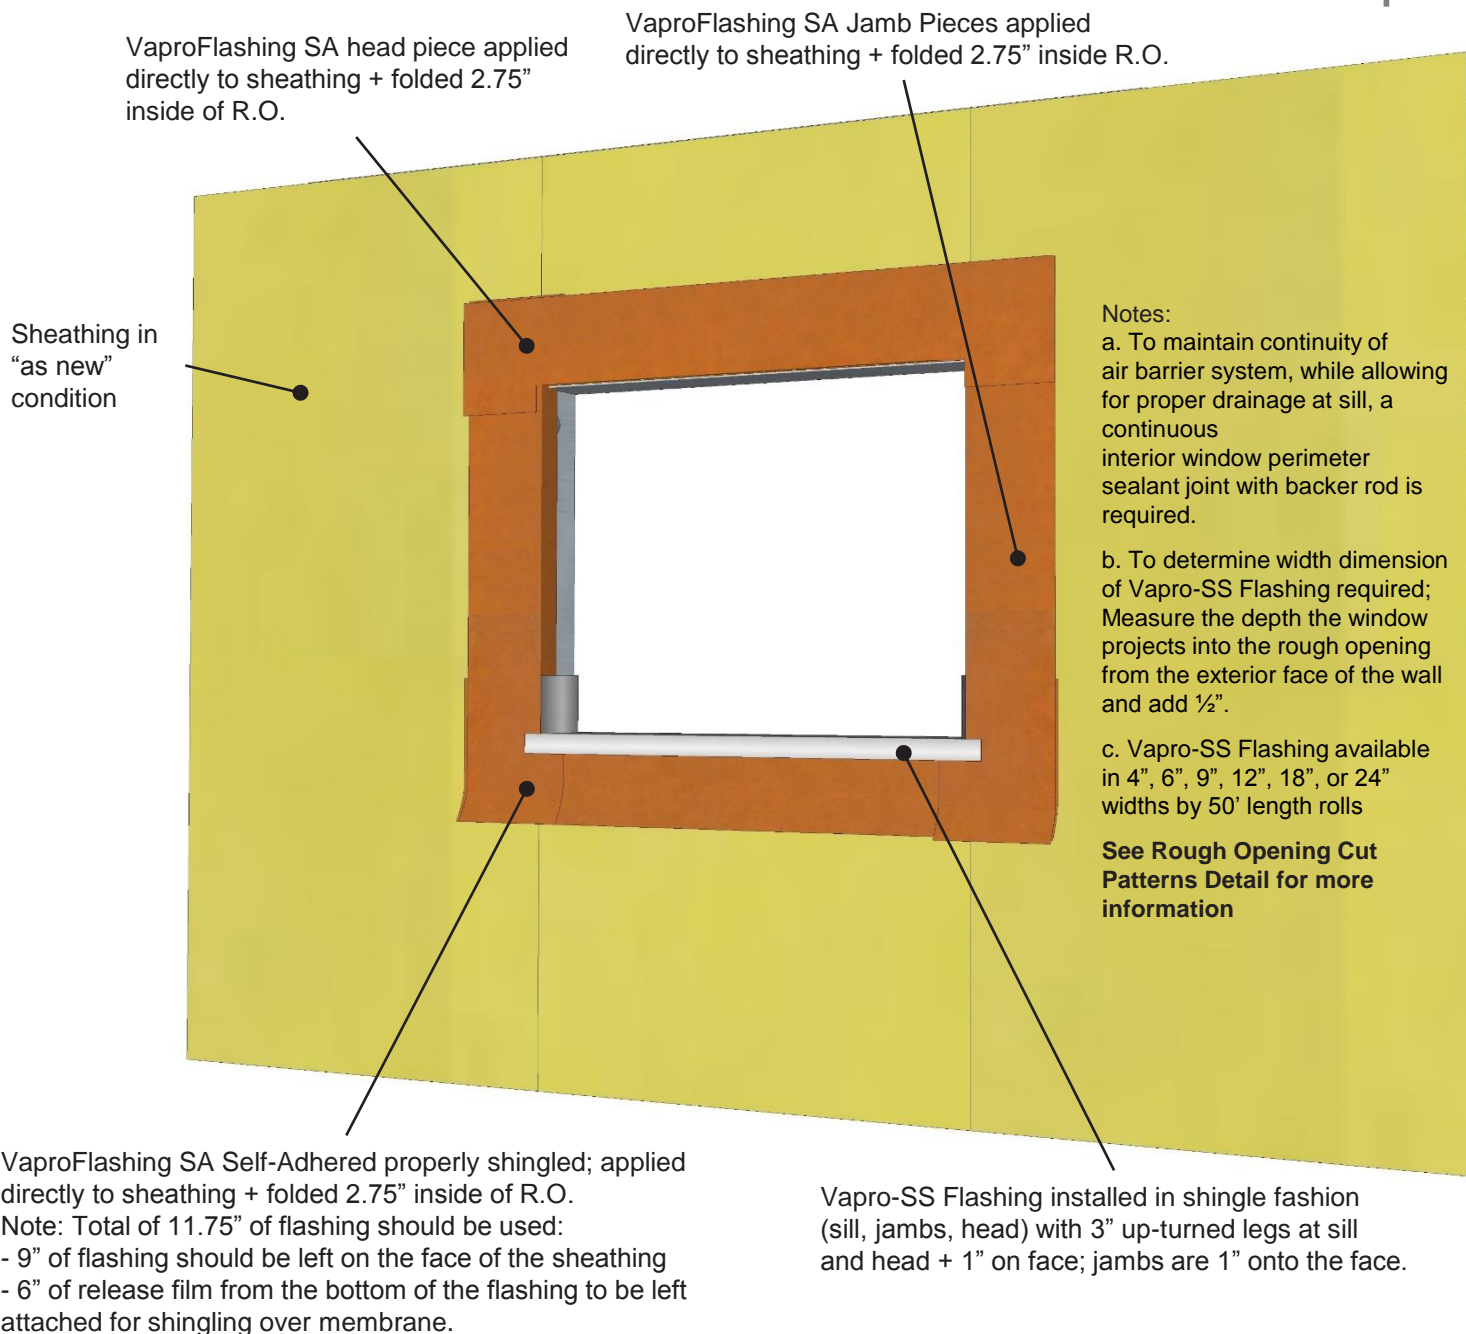

VAPRO-SS FLASHING™

Step 4: Install Sill Piece of Vapro-SS Flashing with 1" on face and 3" upturned to jambs. See Cut Patterns Detail for more information and cut/fold instructions.

PRODUCT DESCRIPTION

Vapro-SS Flashing has been designed with a flexible 2 mil sheet of type 304 stainless steel, 8 mils of butyl adhesive and a siliconized release liner. Vapro-SS Flashing is a self-adhering metal flashing that offers best in class puncture and tear resistance. It can be applied from 20°F (-6°C) to 170°F (77°C) and stays stable and air tight from -70°F (21°C) to 200°F (93°C)

DISCLAIMER

Detail sketch is generic, representing suggested best practices for VaproShield materials, and does not represent a specific job site condition and therefore may not be applicable to certain projects. Detail sketch is designed for use as a reference and must be approved by the designer/consultant of record for each project prior to installation by the subcontractor. Changes and approvals of VaproShield details are the sole responsibility of the designer/consultant of record. VaproShield is **not** the designer of record for building enclosure details and takes no responsibility for the accuracy or interpretation of actual project site conditions.

DRAWN BY: AR

DATE: 05.05.16

REF: 138-4

Always check www.VaproShield.com for the latest details and installation instructions

Rough Opening Flashing Sequence Step 5

VaproFlashing SA Jamb Pieces applied directly to sheathing + folded 2.75" inside R.O.

VaproFlashing SA head piece applied directly to sheathing + folded 2.75" inside of R.O.

Sheathing in "as new" condition

Notes:

a. To maintain continuity of air barrier system, while allowing for proper drainage at sill, a continuous interior window perimeter sealant joint with backer rod is required.

b. To determine width dimension of Vapro-SS Flashing required; Measure the depth the window projects into the rough opening from the exterior face of the wall and add 1/2".

c. Vapro-SS Flashing available in 4", 6", 9", 12", 18", or 24" widths by 50' length rolls

See Rough Opening Cut Patterns Detail for more information

VaproFlashing SA Self-Adhered properly shingled; applied directly to sheathing + folded 2.75" inside of R.O.

Note: Total of 11.75" of flashing should be used:

- 9" of flashing should be left on the face of the sheathing
- 6" of release film from the bottom of the flashing to be left attached for shingling over membrane.

Vapro-SS Flashing installed in shingle fashion (sill, jambs, head) with 3" up-turned legs at sill and head + 1" on face; jambs are 1" onto the face.

VAPRO-SS FLASHING™

Step 5: Install Jamb Pieces of Vapro-SS Flashing with 1" on face. See Cut Patterns Detail for more information and cut/fold instructions.

PRODUCT DESCRIPTION

Vapro-SS Flashing has been designed with a flexible 2 mil sheet of type 304 stainless steel, 8 mils of butyl adhesive and a siliconized release liner. Vapro-SS Flashing is a self-adhering metal flashing that offers best in class puncture and tear resistance. It can be applied from 20°F (-6°C) to 170°F (77°C) and stays stable and air tight from -70°F (21°C) to 200°F (93°C)

DISCLAIMER

Detail sketch is generic, representing suggested best practices for VaproShield materials, and does not represent a specific job site condition and therefore may not be applicable to certain projects. Detail sketch is designed for use as a reference and must be approved by the designer/consultant of record for each project prior to installation by the subcontractor. Changes and approvals of VaproShield details are the sole responsibility of the designer/consultant of record. VaproShield is **not** the designer of record for building enclosure details and takes no responsibility for the accuracy or interpretation of actual project site conditions.

DRAWN BY: AR

DATE: 05.05.16

REF: 138-5

Always check www.VaproShield.com for the latest details and installation instructions

Rough Opening Flashing Sequence Step 6

VaproFlashing SA Jamb Pieces applied directly to sheathing + folded 2.75" inside R.O.

VaproFlashing SA head piece applied directly to sheathing + folded 2.75" inside of R.O.

Sheathing in "as new" condition

Notes:

a. To maintain continuity of air barrier system, while allowing for proper drainage at sill, a continuous interior window perimeter sealant joint with backer rod is required.

b. To determine width dimension of Vapro-SS Flashing required; Measure the depth the window projects into the rough opening from the exterior face of the wall and add 1/2".

c. Vapro-SS Flashing available in 4", 6", 9", 12", 18", or 24" widths by 50' length rolls

See Rough Opening Cut Patterns Detail for more information

VaproFlashing SA Self-Adhered properly shingled; applied directly to sheathing + folded 2.75" inside of R.O.

Note: Total of 11.75" of flashing should be used:

- 9" of flashing should be left on the face of the sheathing
- 6" of release film from the bottom of the flashing to be left attached for shingling over membrane.

Vapro-SS Flashing installed in shingle fashion (sill, jambs, head) with 3" up-turned legs at sill and head + 1" on face; jambs are 1" onto the face.

VAPRO-SS FLASHING™

Step 6: Install Head Piece of Vapro-SS Flashing with 1" on face and 3" turned down onto jambs. See Cut Patterns Detail for more information and cut/fold instructions.

PRODUCT DESCRIPTION

Vapro-SS Flashing has been designed with a flexible 2 mil sheet of type 304 stainless steel, 8 mils of butyl adhesive and a siliconized release liner. Vapro-SS Flashing is a self-adhering metal flashing that offers best in class puncture and tear resistance. It can be applied from 20°F (-6°C) to 170°F (77°C) and stays stable and air tight from -70°F (21°C) to 200°F (93°C)

DISCLAIMER

Detail sketch is generic, representing suggested best practices for VaproShield materials, and does not represent a specific job site condition and therefore may not be applicable to certain projects. Detail sketch is designed for use as a reference and must be approved by the designer/consultant of record for each project prior to installation by the subcontractor. Changes and approvals of VaproShield details are the sole responsibility of the designer/consultant of record. VaproShield is **not** the designer of record for building enclosure details and takes no responsibility for the accuracy or interpretation of actual project site conditions.


DRAWN BY: AR

DATE: 05.05.16

REF: 138-6

Always check www.VaproShield.com for the latest details and installation instructions

Rough Opening Flashing Sequence Step 7

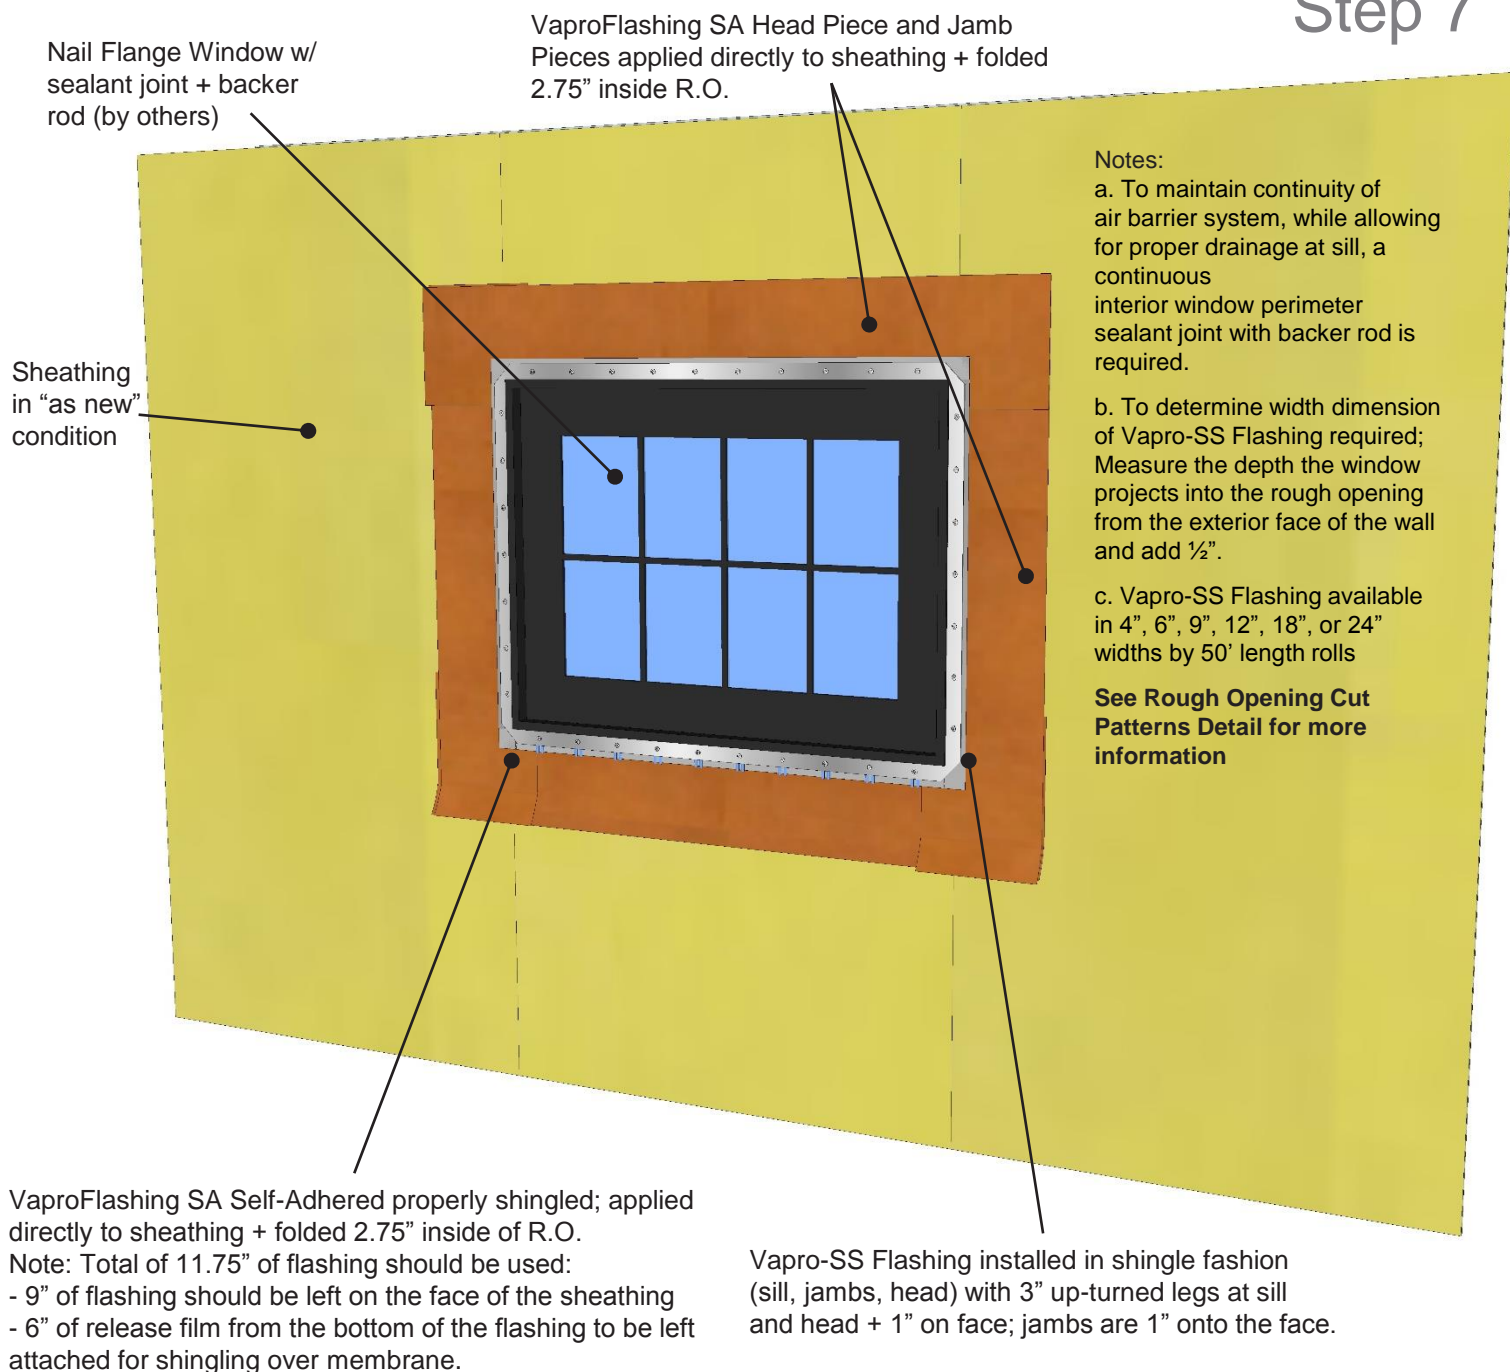

VAPRO-SS FLASHING™

Step 7: Install nail flange window
Window w/ sealant joint + backer
rod (by others)

PRODUCT DESCRIPTION

Vapro-SS Flashing has been designed with a flexible 2 mil sheet of type 304 stainless steel, 8 mils of butyl adhesive and a siliconized release liner. Vapro-SS Flashing is a self-adhering metal flashing that offers best in class puncture and tear resistance. It can be applied from 20°F (-6°C) to 170°F (77°C) and stays stable and air tight from -70°F (21°C) to 200°F (93°C)

DISCLAIMER

Detail sketch is generic, representing suggested best practices for VaproShield materials, and does not represent a specific job site condition and therefore may not be applicable to certain projects. Detail sketch is designed for use as a reference and must be approved by the designer/ consultant of record for each project prior to installation by the subcontractor. Changes and approvals of VaproShield details are the sole responsibility of the designer/consultant of record. VaproShield is **not** the designer of record for building enclosure details and takes no responsibility for the accuracy or interpretation of actual project site conditions.


DRAWN BY: AR

DATE: 05.05.16

REF: 138-7

Always check www.VaproShield.com for the latest details and installation instructions

Rough Opening Flashing Sequence Step 8

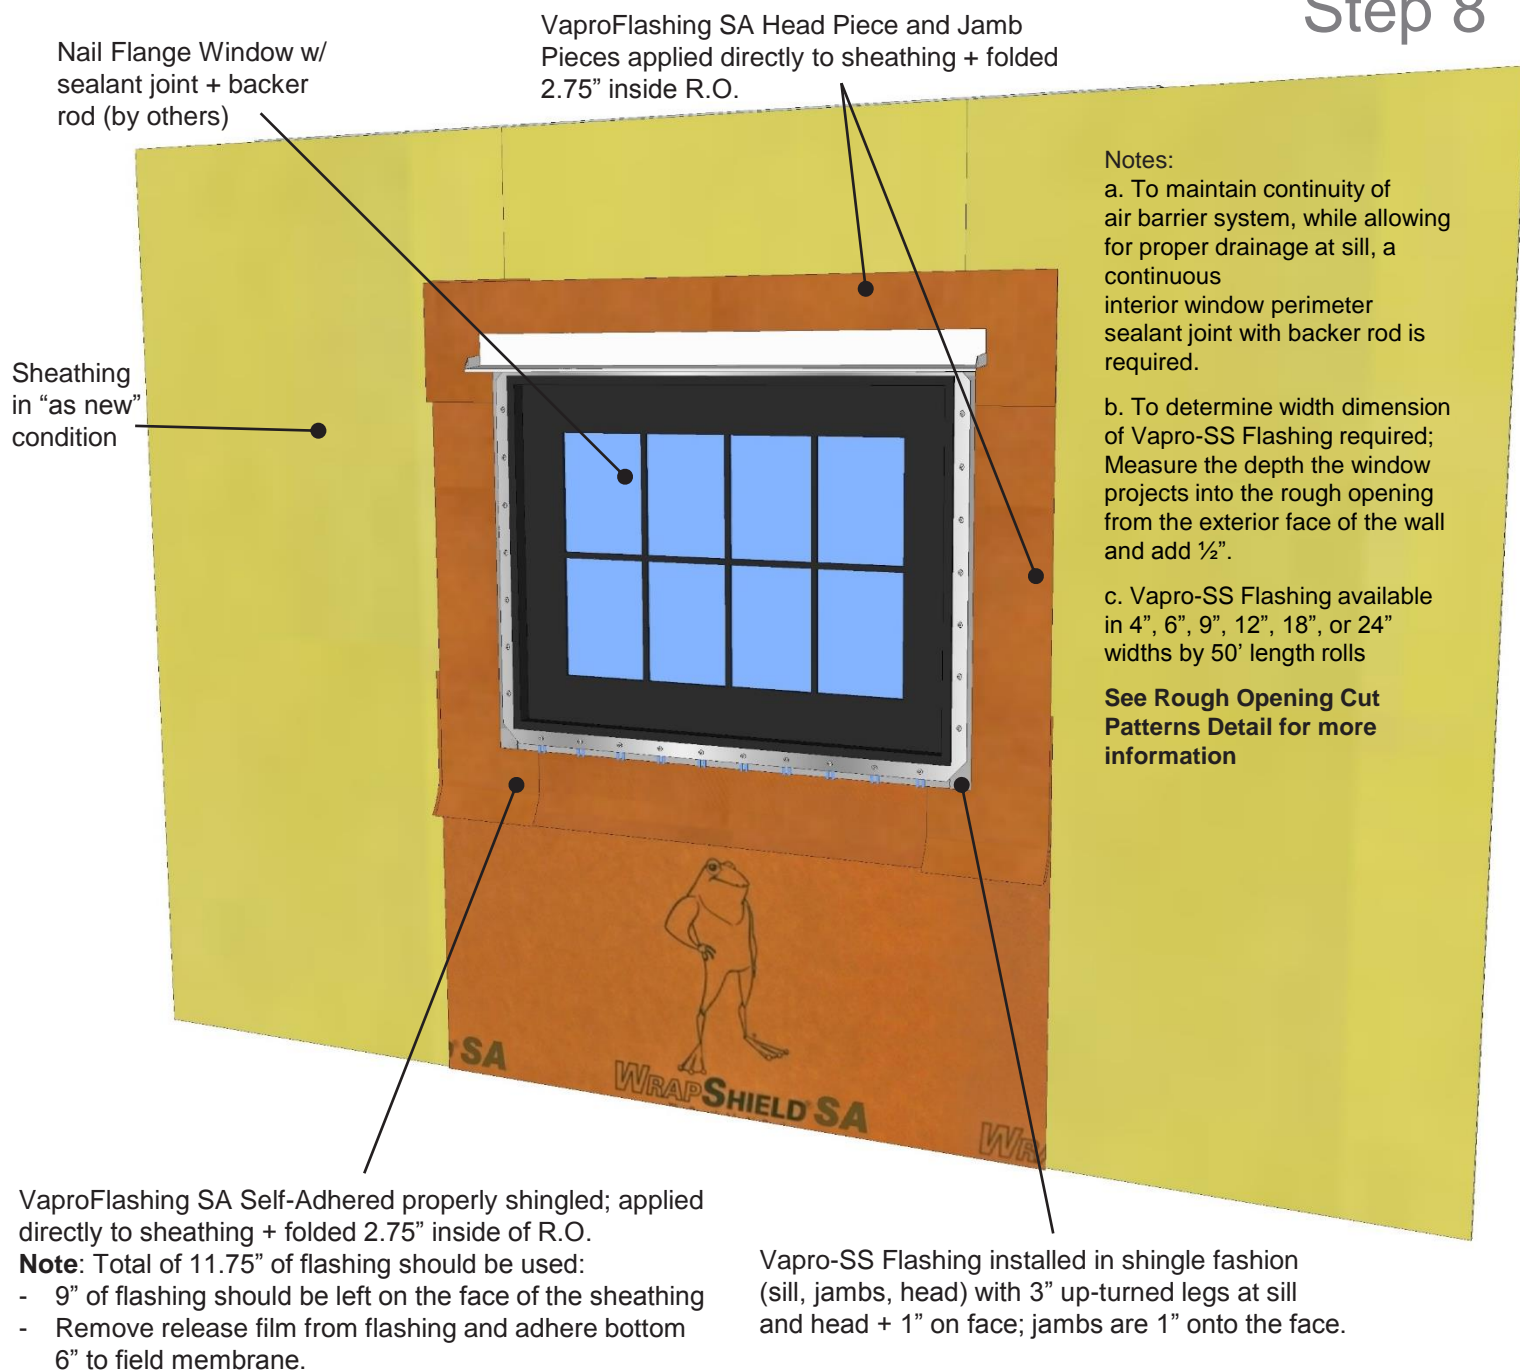

VAPRO-SS FLASHING™

Step 8: Install metal head flashing (by others) over cured VaproLiqui-Flash and install field membrane, shingled underneath window flashing

PRODUCT DESCRIPTION

Vapro-SS Flashing has been designed with a flexible 2 mil sheet of type 304 stainless steel, 8 mils of butyl adhesive and a siliconized release liner. Vapro-SS Flashing is a self-adhering metal flashing that offers best in class puncture and tear resistance. It can be applied from 20°F (-6°C) to 170°F (77°C) and stays stable and air tight from -70°F (21°C) to 200°F (93°C)

DISCLAIMER

Detail sketch is generic, representing suggested best practices for VaproShield materials, and does not represent a specific job site condition and therefore may not be applicable to certain projects. Detail sketch is designed for use as a reference and must be approved by the designer/ consultant of record for each project prior to installation by the subcontractor. Changes and approvals of VaproShield details are the sole responsibility of the designer/consultant of record. VaproShield is **not** the designer of record for building enclosure details and takes no responsibility for the accuracy or interpretation of actual project site conditions.


DRAWN BY: AR

DATE: 05.05.16

REF: 138-8

Always check www.VaproShield.com for the latest details and installation instructions

Rough Opening Flashing Sequence Step 9

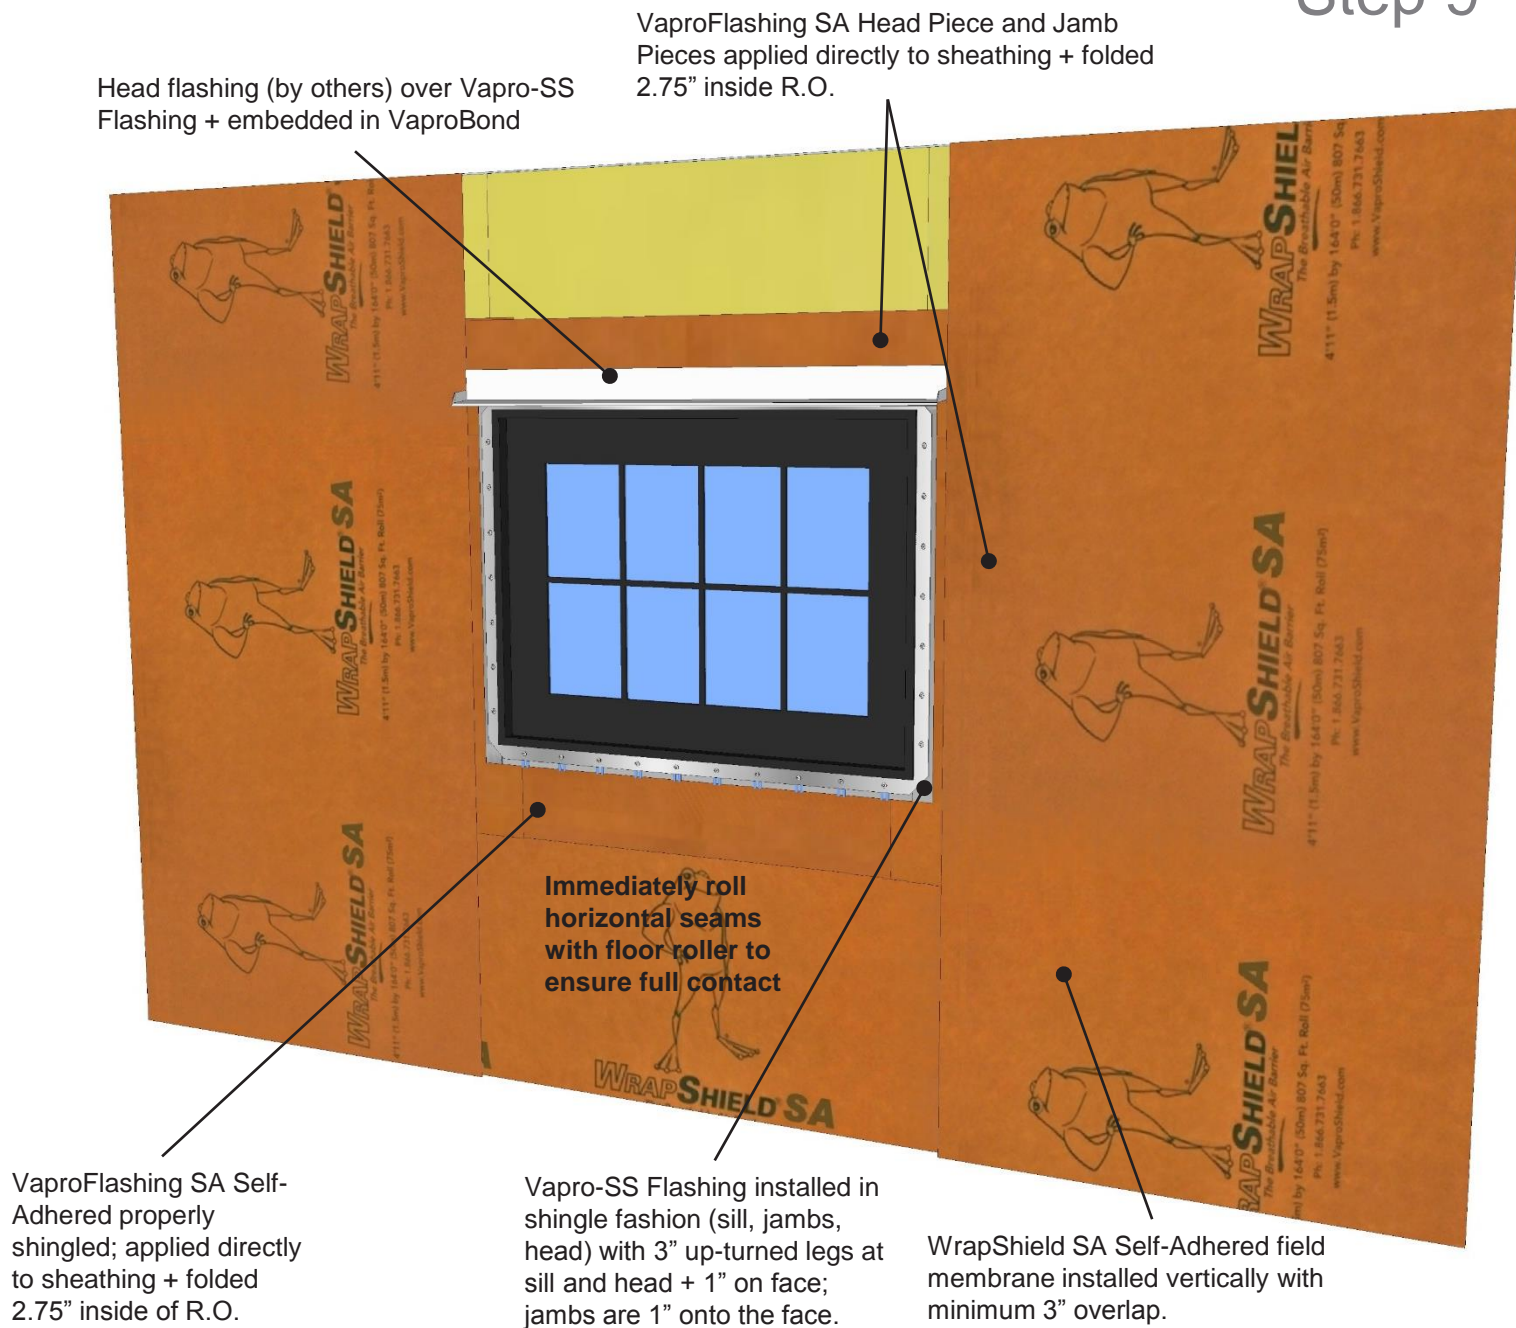

VAPRO-SS FLASHING™

Step 9: Install field membrane vertically to sheathing, maintaining 3" minimum overlap with R.O. flashing

PRODUCT DESCRIPTION

Vapro-SS Flashing has been designed with a flexible 2 mil sheet of type 304 stainless steel, 8 mils of butyl adhesive and a siliconized release liner. Vapro-SS Flashing is a self-adhering metal flashing that offers best in class puncture and tear resistance. It can be applied from 20°F (-6°C) to 170°F (77°C) and stays stable and air tight from -70°F (21°C) to 200°F (93°C)

DISCLAIMER

Detail sketch is generic, representing suggested best practices for VaproShield materials, and does not represent a specific job site condition and therefore may not be applicable to certain projects. Detail sketch is designed for use as a reference and must be approved by the designer/ consultant of record for each project prior to installation by the subcontractor. Changes and approvals of VaproShield details are the sole responsibility of the designer/consultant of record. VaproShield is **not** the designer of record for building enclosure details and takes no responsibility for the accuracy or interpretation of actual project site conditions.

DRAWN BY: AR

DATE: 05.05.16


REF: 138-9

Always check www.VaproShield.com for the latest details and installation instructions

Rough Opening Flashing Sequence Step 10

Nail Flange Window w/
Exterior perimeter
sealant joint + backer
rod (by others)

WrapShield SA Self-Adhered
installed over head flashing and
VaproFlashing SA

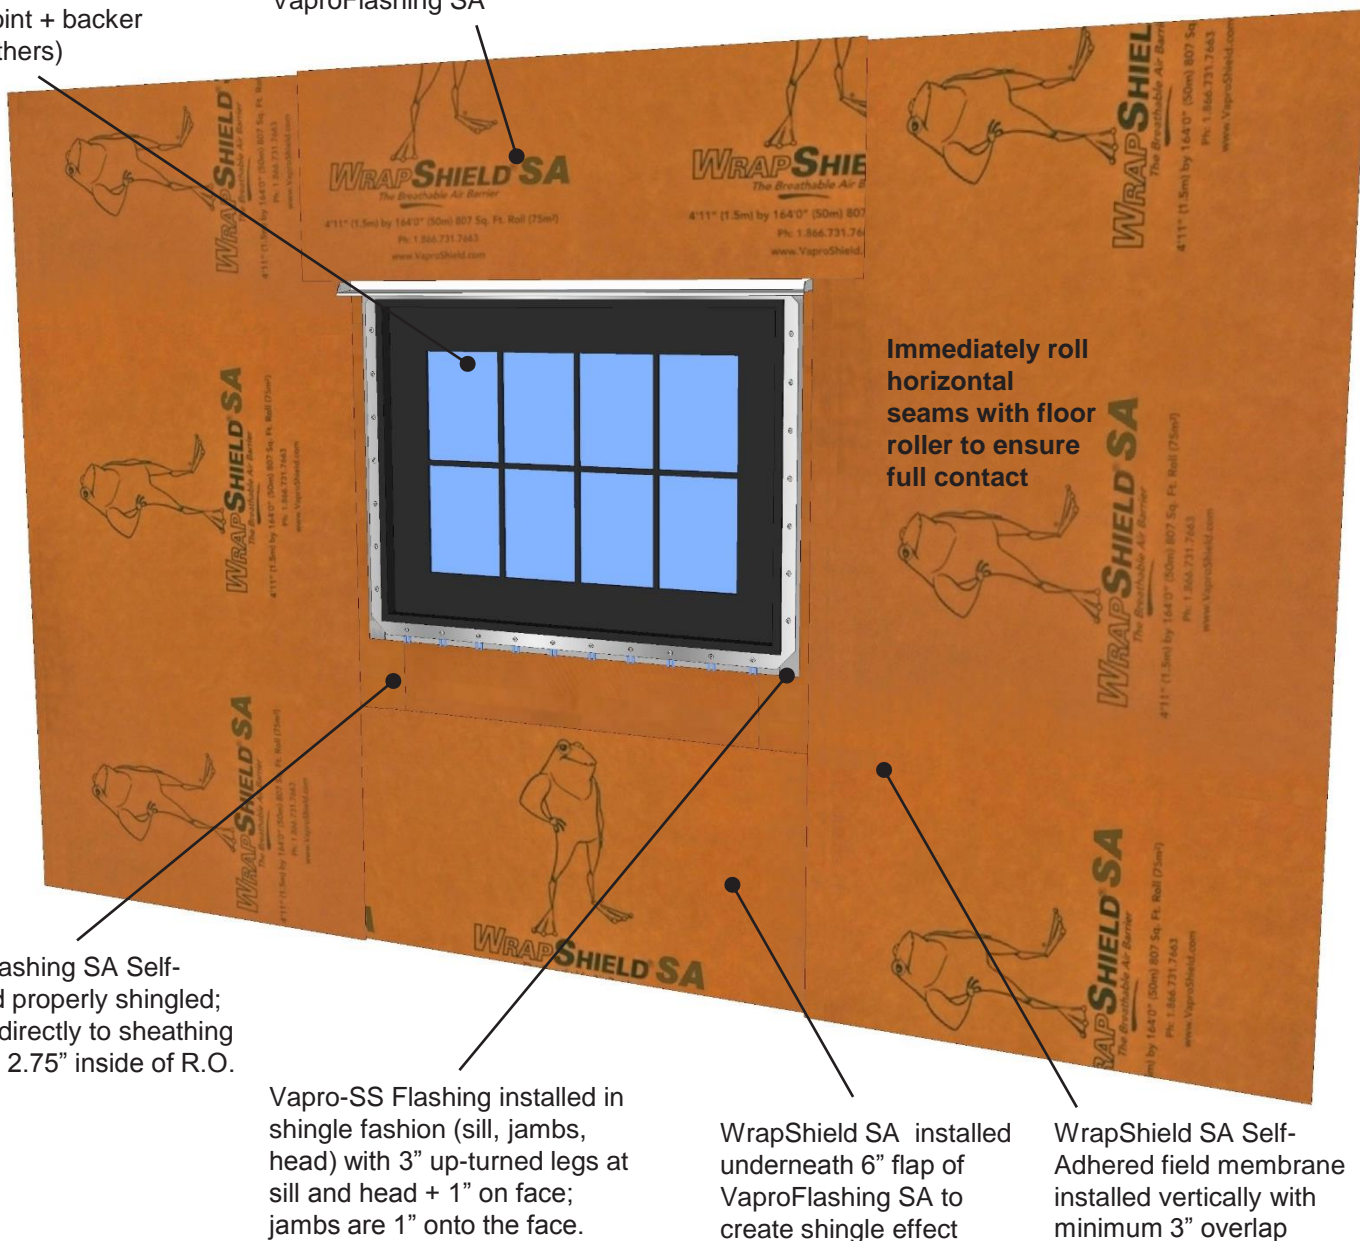

VAPRO-SS FLASHING™

Step 10: Install field membrane
over metal head flashing,
maintaining 3" minimum overlap to
adjacent field membrane.

PRODUCT DESCRIPTION

Vapro-SS Flashing has been designed with a flexible 2 mil sheet of type 304 stainless steel, 8 mils of butyl adhesive and a siliconized release liner. Vapro-SS Flashing is a self-adhering metal flashing that offers best in class puncture and tear resistance. It can be applied from 20°F (-6°C) to 170°F (77°C) and stays stable and air tight from -70°F (21°C) to 200°F (93°C)

DISCLAIMER

Detail sketch is generic, representing suggested best practices for VaproShield materials, and does not represent a specific job site condition and therefore may not be applicable to certain projects. Detail sketch is designed for use as a reference and must be approved by the designer/ consultant of record for each project prior to installation by the subcontractor. Changes and approvals of VaproShield details are the sole responsibility of the designer/consultant of record. VaproShield is **not** the designer of record for building enclosure details and takes no responsibility for the accuracy or interpretation of actual project site conditions.

DRAWN BY: AR

DATE: 05.05.16

REF: 138-10

Always check www.VaproShield.com for the latest details and installation instructions