


Nail Flange Window Rough Opening Flashing: Exploded

- 1.) VaproFlashing SA Self Adhered Sill Piece applied directly to sheathing + installed 2.75" inside of R.O. Release film to be left on bottom 6" of flashing to create shingle effect with field membrane
- 2.) VaproFlashing SA Self Adhered Jamb Pieces applied directly to sheathing at edge of rough opening and outer edge + installed 2.75" inside of R.O.
- 3.) VaproFlashing SA Self Adhered Head Piece applied directly to sheathing at edge of rough opening and top edge + installed 2.75" inside of R.O.
- 4.) VaproBond @ inside rough opening + 1" on face

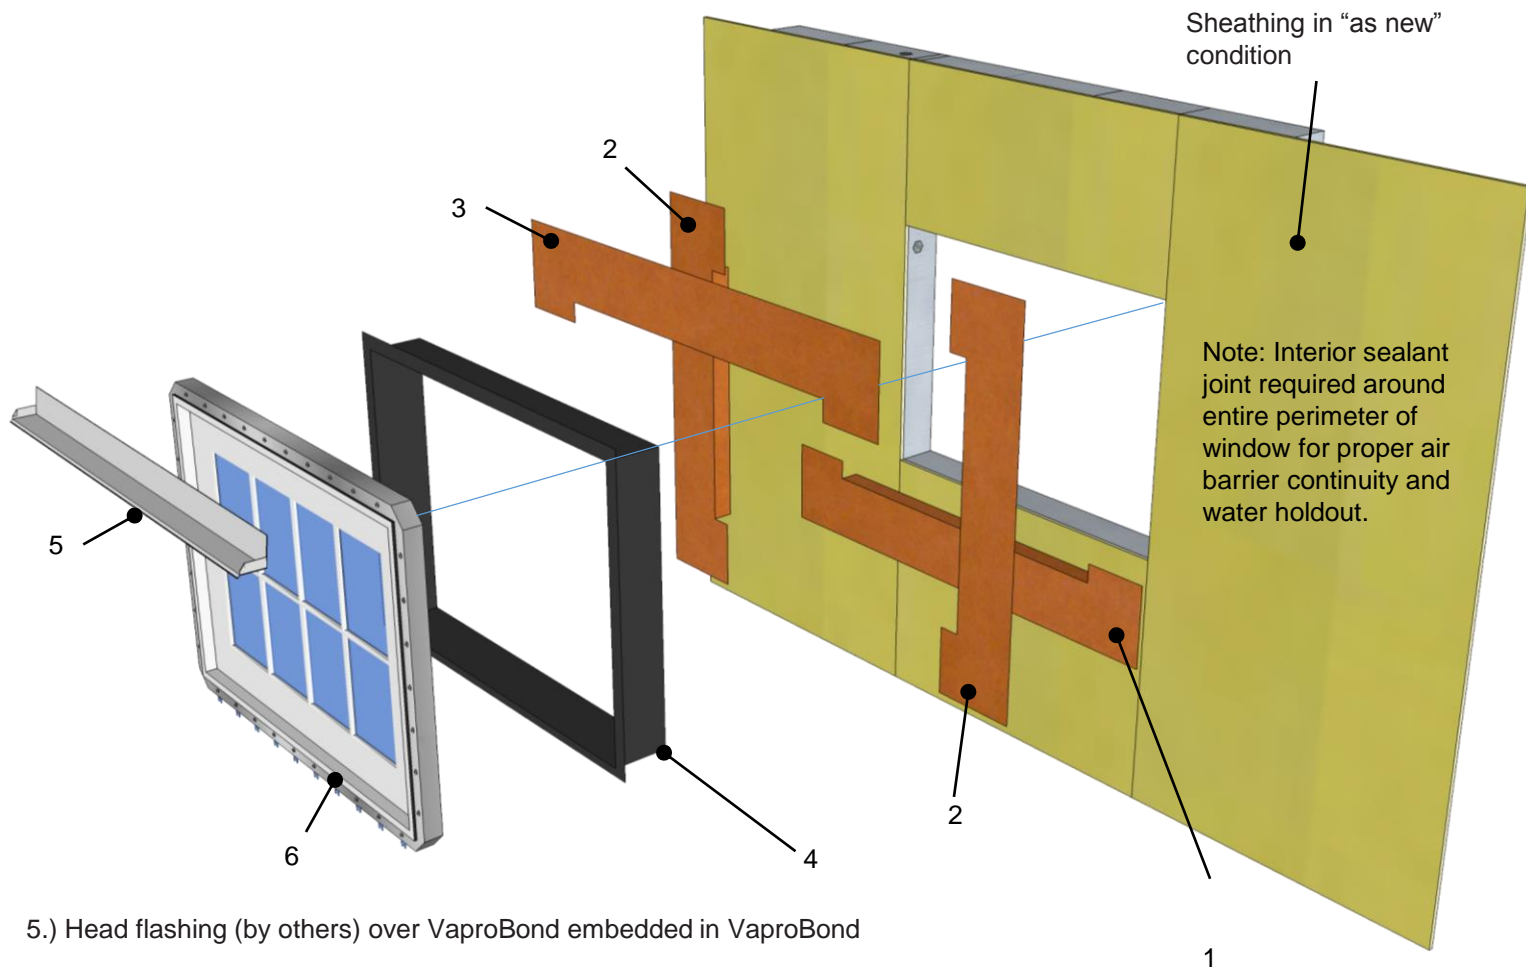

- 5.) Head flashing (by others) over VaproBond embedded in VaproBond
- 6.) Window with Nailing Flange
- 7.) VaproBond Sealant @ head, left, and right jamb flanges

VAPROBOND[™]

PRODUCT DESCRIPTION
VaproBond[™] is a single component 100% silicone adhesive sealant used to bind layers of VaproShield membranes to each other or typical construction material surfaces. It simplifies the process of producing watertight, airtight details.

DISCLAIMER

Detail sketch is generic, representing suggested best practices for VaproShield materials, and does not represent a specific job site condition and therefore may not be applicable to certain projects. Detail sketch is designed for use as a reference and must be approved by the designer/consultant of record for each project prior to installation by the subcontractor. Changes and approvals of VaproShield details are the sole responsibility of the designer/consultant of record. VaproShield is **not** the designer of record for building enclosure details and takes no responsibility for the accuracy or interpretation of actual project site conditions.

DRAWN BY: AR

DATE: 11/2017

REF: 191

Always check www.VaproShield.com for the latest details and installation instructions