

## NFPA 285 Compliant Wall Assembly

Exterior to Interior - Ref:1001


Limestone or Natural Stone, Xci Foil (Class A) and Xci 286, Concrete Masonry Wall

Limestone or Natural Stone, Xci Foil (Class A) and Xci 286, Concrete Masonry Wall View WRB placement variations p.2

WrapShield SA Self-Adhered is a self-adhered, water resistive (WRB) vapor permeable air barrier sheet membrane adhered directly to substrate.

RevealShield SA Self-Adhered is a black, UV stable, water resistive (WRB) vapor permeable self-adhered air barrier membrane for open joint rain screen cladding systems.

Per Chapter 26 of the International Building Code, the wall assembly shall be tested in accordance with and comply with the acceptance criteria of NFPA 285. The listed assemblies in this document have met that criteria according to Hunter Panels. Visit hunterpanels.com for verification.

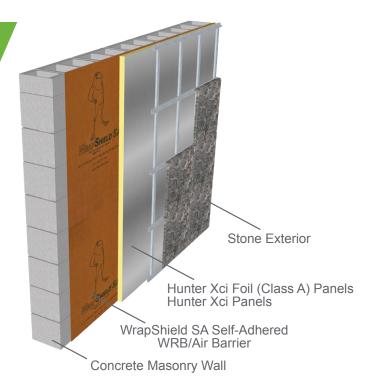

Comprehensive details available at VaproShield.com.

Illustration for explanatory purposes only.

Wall Component

Materials

**Base Wall System** 

Concrete Wall (cast in place or precast)

**Approved Exterior Finish** 

Fiber Cement—Fiber Cement Board siding. Any standard installation technique can be used.

**Terra Cotta Cladding**—Use any Terra Cotta Cladding System in which Terra Cotta is minimum  $\frac{1}{2}$ ". Any non-open joint installation technique or ventilated shiplap may be used.

Autoclaved Aerated Concrete—AAC panels that have successfully passed NFPA 285 criteria.

**Material Options** 

1) 3.5" max thickness of Hunter Xci Foil (Class A) or Hunter Xci 286

2) 4" max thickness of Hunter Xci Foil (Class A) or Hunter Xci 286 with non-combustible claddings1

Floorline Firestopping

Not Applicable

**Stud Cavity** 

Not Applicable

**Exterior Sheathing** 

Not Applicable

Weather Resistive Membrane Applied to Base Wall

Vaproshield Wrapshield SA, RevealShield SA

Weather Resistive Membrane Applied to Exterior Insulation

Vaproshield Wrapshield SA, RevealShield SA

The location and number of WRB's in the wall assembly are determined by the architect. See p.2 for additional illustrations showing VaproShield WRB/Air Barrier placement.





## NFPA 285 Compliant Wall Assembly

Exterior to Interior - Ref:1001

Limestone or Natural Stone, Xci Foil (Class A) and Xci 286, Concrete Masonry Wall

## VaproShield WRB/Air Barrier Placement Variations as per Hunter NFPA 285 Test Data

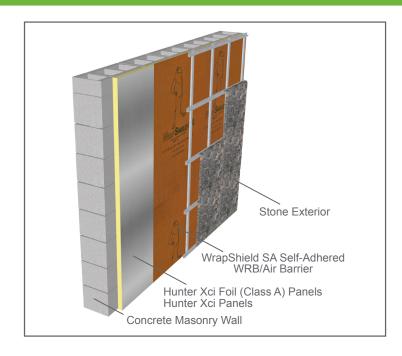

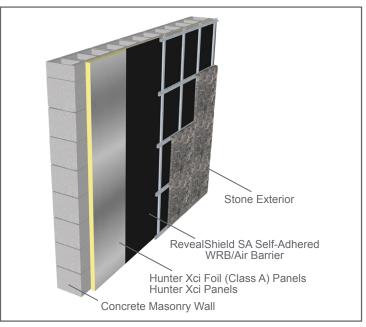

Comprehensive details available at VaproShield.com. Illustration for explanatory purposes only.