


NFPA 285 Compliant Wall Assembly

Exterior to Interior - Ref:1001 Limestone or Natural Stone, Xci Ply and Xci Ply (Class A), Concrete Masonry Wall

Limestone or Natural Stone, Xci Ply and Xci Ply (Class A), Concrete Masonry Wall View WRB placement variations p.2

WrapShield SA Self-Adhered is a self-adhered, water resistive (WRB) vapor permeable air barrier sheet membrane adhered directly to substrate. RevealShield SA Self-Adhered is a black, UV stable, water resistive (WRB) vapor permeable self-adhered air barrier membrane for open joint rain screen cladding systems.

Per Chapter 26 of the International Building Code, the wall assembly shall be tested in accordance with and comply with the acceptance criteria of NFPA 285. The listed assemblies in this document have met that criteria according to Hunter Panels. Visit hunterpanels.com for verification.

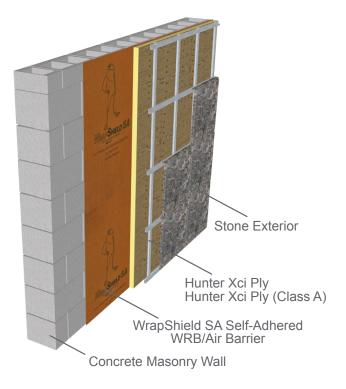

Materials	Comprehensive details available at VaproShield.com. Illustration for explanatory purposes only.
Concrete Wall (cast in place or precast)	
Fiber Cement—Fiber Cement Board siding. Any standar Terra Cotta Cladding—Use any Terra Cotta Cladding Sy Any non-open joint installation technique or ventilated s Autoclaved Aerated Concrete—AAC panels that have s	rstem in which Terra Cotta is minimum ½". hiplap may be used.
1) 3.5" max thickness of Hunter Xci Foil (Class A) or Hun 2) 4" max thickness of Hunter Xci Foil (Class A) or Hunt	
Not Applicable	
Not Applicable	
Not Applicable	
Vaproshield Wrapshield SA, RevealShield SA	
Vaproshield Wrapshield SA, RevealShield SA	
	Concrete Wall (cast in place or precast) Fiber Cement—Fiber Cement Board siding. Any standa Terra Cotta Cladding—Use any Terra Cotta Cladding Sy Any non-open joint installation technique or ventilated s Autoclaved Aerated Concrete—AAC panels that have s 1) 3.5" max thickness of Hunter Xci Foil (Class A) or Hu 2) 4" max thickness of Hunter Xci Foil (Class A) or Hunt Not Applicable Not Applicable Not Applicable Vaproshield Wrapshield SA, RevealShield SA

The location and number of WRB's in the wall assembly are determined by the architect. See p.2 for additional illustrations showing VaproShield WRB/Air Barrier placement.


VaproShield LLC 915 26th Ave. N.W. Suite C5 Gig Harbor, WA 98335 886.731.7663 • www.vaproshield.com VaproShield Canada 101-1001 W. Broadway Suite 545 Vancouver, B.C. V6H 4E4, Canada 886.871.8263 • www.vaproshield.ca Hunter Panels 15 Franklin St Portland, ME 04101 888.746.1114 • www.hunterpanels.com




NFPA 285 Compliant Wall Assembly

Exterior to Interior - Ref:1001 Limestone or Natural Stone, Xci Ply and Xci Ply (Class A), Concrete Masonry Wall

VaproShield WRB/Air Barrier Placement Variations as per Hunter NFPA 285 Test Data

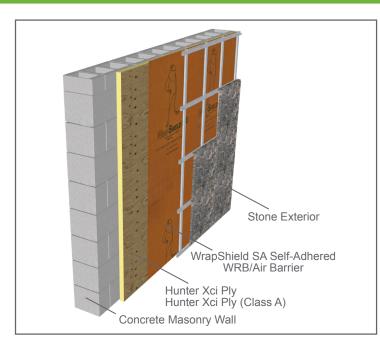

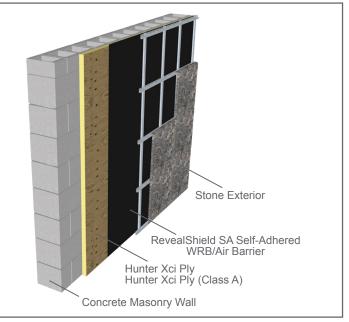

Comprehensive details available at VaproShield.com. Illustration for explanatory purposes only.

VaproShield LLC 915 26th Ave. N.W. Suite C5 Gig Harbor, WA 98335 886.731.7663 • www.vaproshield.com VaproShield Canada 101-1001 W. Broadway Suite 545 Vancouver, B.C. V6H 4E4, Canada 886.871.8263 • www.vaproshield.ca

Hunter Panels 15 Franklin St Portland, ME 04101 888.746.1114 • www.hunterpanels.com