

NFPA 285 Compliant Wall Assembly

Exterior to Interior - Ref:1044 FunderMax m.look Grey Core HPL, Xci Ply and Xci Ply (Class A), Treated Wood Stud

FunderMax m.look Grey Core HPL, Xci Ply and Xci Ply (Class A), Treated Wood Stud

WrapShield SA Self-Adhered is a self-adhered, water resistive (WRB) vapor permeable air barrier sheet membrane adhered directly to substrate. RevealShield SA Self-Adhered is a black, UV stable, water resistive (WRB) vapor permeable self-adhered air barrier membrane for open joint rain screen cladding systems.

Per Chapter 26 of the International Building Code, the wall assembly shall be tested in accordance with and comply with the acceptance criteria of NFPA 285. The listed assemblies in this document have met that criteria according to Hunter Panels. Visit hunterpanels.com for v€ rification.



Comprehensive details available at VaproShield.com. Illustration for explanatory purposes only.

Wall Component	Materials Illustration for explanatory purposes only.
Base Wall System	FRTW (Fire-retardant-treated wood) studs: min norminal 2x4 dimension, spaced 24" o.c. (max) 5/8" type X Gypsum Wallboard Interior and Bracing as required by cude.
Approved Exterior Finish	FunderMax m.look Grey Core HPL—minimum 1/4" thick using any standard installation technique
Material Options	1) 3.5″ max thickness of Hunter Xci Foil (Class A) or Hunter Xci 286 2) 4″ max thickness of Hunter Xci Foil (Class A) or Hunter Xci 286 with non-combustible claddings
Floorline Firestopping	Not Applicable
Stud Cavity	Not Applicable
Exterior Sheathing	Not Applicable
Weather Resistive Membrane Applied to Base Wall	VaproShield WrapShield SA Self-Adhered, RevealShield SA Self-Adhered
Weather Resistive Membrane Applied to Exterior Insulation	VaproShield WrapShield SA Self-Adhered, RevealShield SA Self-Adhered
	The location and number of WRB's in the wall assembly are determined by the architect.
	See a 2 for additional illustrations showing Vanro Shield W/PD/Air Parrier placement

See p.2 for additional illustrations showing VaproShield WRB/Air Barrier placement.

VaproShield LLC 915 26th Ave. N.W. Suite C5 Gig Harbor, WA 98335 886.731.7663 • www.vaproshield.com

VaproShield Canada 101-1001 W. Broadway Suite 545 Vancouver, B.C. V6H 4E4, Canada 886.871.8263 • www.vaproshield.ca Hunter Panels 15 Franklin St Portland, ME 04101 888.746.1114 • www.hunterpanels.com




NFPA 285 Compliant Wall Assembly

Exterior to Interior - Ref:1044 FunderMax m.look Grey Core HPL, Xci Ply and Xci Ply (Class A), Treated Wood Stud

VaproShield WRB/Air Barrier Placement Variations as per Hunter NFPA 285 Test Data



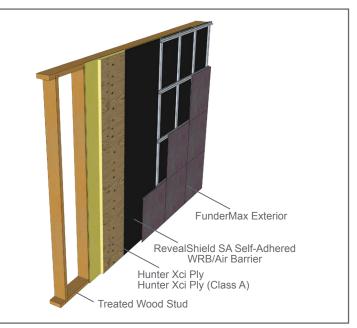

Comprehensive details available at VaproShield.com. Illustration for explanatory purposes only.

VaproShield LLC 915 26th Ave. N.W. Suite C5 Gig Harbor, WA 98335 886.731.7663 • www.vaproshield.com VaproShield Canada 101-1001 W. Broadway Suite 545 Vancouver, B.C. V6H 4E4, Canada 886.871.8263 • www.vaproshield.ca

Hunter Panels 15 Franklin St Portland, ME 04101 888.746.1114 • www.hunterpanels.com