

RevealShield IT™ Integrated Tape

a black mechanically attached, UV stable, water resistive vapor permeable air barrier membrane with integrated tape at the horizontal seams: Product No: 12309099

RevealFlashing SA

Product No.: 44305500

Product Description

RevealShield IT Integrated Tape WRB/Air Barrier membrane protects the building envelope by allowing vapor pass through (breathable) but not air or liquid water mitigating costly moisture damage and saving energy for the life of the building.

BASIC USE

RevealShield IT Integrated Tape is installed above grade behind open joint rain screen wall cladding assemblies where permanent UV exposure is inherent.

CLADDING OPEN JOINTS

Cladding open joints can be up to 2" (5.1 cm) or up to 40% of the total elevation area.

MATERIALS

RevealShield IT Integrated Tape consists of layers of spun-bonded polyester fabric with clear integrated horizontal tape and a pre-marked lap template to ensure accurate horizontal seam installation

BENEFITS

Uniquely suited for open joint cladding requiring advanced UV protection such as perforated panels, reclaimed wood and special open joint facades.

Superior building envelope protection – high drying capacity (98 perms) allows building materials to dry-out, reducing the risk of damage from moisture infiltration, mold, mildew and rot for the life of the building.

Factory installed clear integrated tape – seals horizontal seams ensuring the upper layer shingles over the lower layer creating the 6" shingled effect.

Pre-marked shingle template – increases installation accuracy.

Air tight barrier – stops air infiltration as per the ASTM 2357 Air Barrier assembly test.

Consistent millage thickness – factory made rolled good

Fully tested building envelope system – rough opening flashing accessories eliminate the need for untested outside components.

Mechanically attaches – to multiple substrates using VaproCaps™.

Simple installation – requires only basic tools, no specialized mobilizations or protection gear are required.

Install on dry and/or saturated substrates – eliminates additional water accumulation by locking out liquid water allowing vapor diffusive drying and helping to "dry-in" the building.

Spans substrate joint gaps up to 7/8" (22.2mm), eliminates need for tapes and fillers.

Phase construction ready, installs in **all temperatures**, sustains up to 12 months exposure before permanent open joint cladding installation.

Emits zero VOCs, no primer required, ensuring crew safety and a healthy building.

Technical Data & Environmental

Passed and tested to industry standards for Weather Resistive Barriers.

RevealShield IT Integrated tape emits zero VOCs, making the membrane safe for work crews and occupants for the life of the building.


Compatible Substrates

- OSB
- Exterior Gypsum Sheathing
- Rigid Insulation
- Precast Concrete
- Concrete Block
- Cast-in-place Concrete
- Plywood
- Pre-painted Steel
- Galvanized Metal
- Aluminum (Painted/Mill Finish)
- Anodized Aluminum
- Vinyl Window and Door Frames
- Fiberglass Window and Door Frames

Contact VaproShield Technical – if you have additional substrate questions.

| PHYSICAL PROPERTIES | |
|--|---|
| PROPERTY | RESULT |
| Color | Black (top), Black (back) |
| Thickness | 0.45 mm (18 mil) |
| Membrane Weight | 309.7 g/m ² (1.15 oz/ft ²) |
| Roll Weight | 54 lbs (24.5 kg) |
| Roll Dimensions | 59" x 164' (1.5m x 50m) |
| Roll Coverage | 807 sq. ft. (75 sq. m.) |
| Skid | 25 Rolls |
| VOCs | None |
| Exposure Before Permanent Open Joint Cladding Installation | 12 months |
| Minimum Application Temperature | None |
| Service Temperature | minus 40°F (-40°C) - 225°F (121°C) |
| Warranty | 20 year material warranty |

RevealShield IT Product No.: 12309099/ RevealFlashing SA Product No.: 44305500

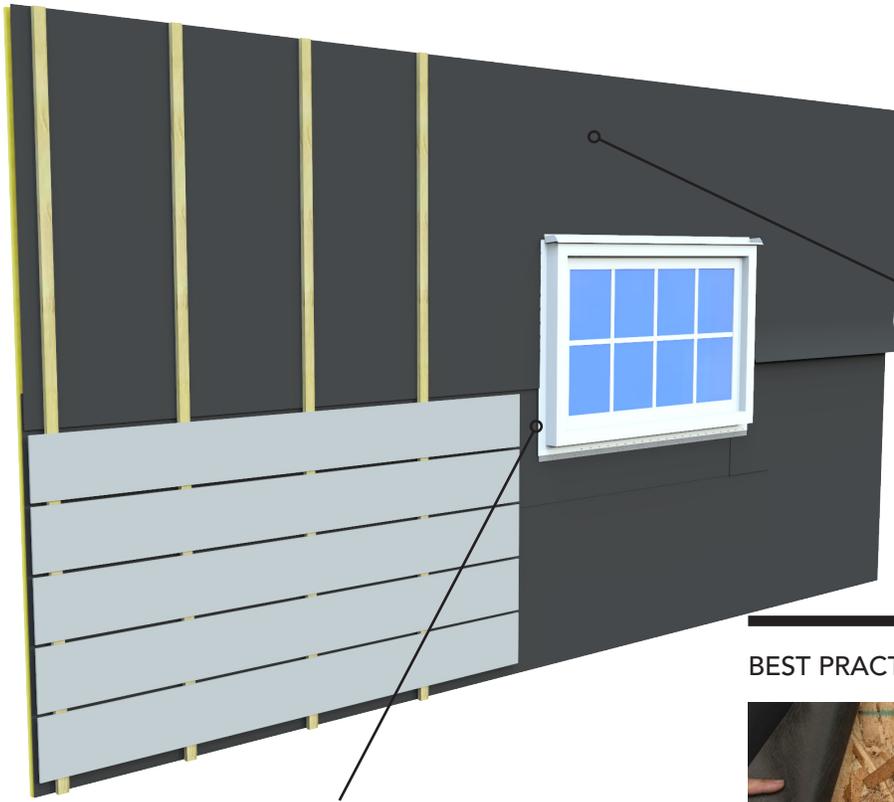

Complete Building Envelope System

WRB/AIR BARRIER
RevealShield IT Integrated Tape

ROUGH OPENING FLASHING OPTIONS

The following rough opening flashing components can be used:

- VaproLiqui-Flash™
- BlockFlashing™ or RevealFlashing SA™
- VaproBond™

Reference individual data sheets for comprehensive information.

| Rough Opening Flashing Membranes | | | |
|-------------------------------------|----------|---|--|
| Product | Part No. | Roll Sizes | |
| RevealFlashing SA Self-Adhered Roll | 44305500 | Roll Size: 11 3/4" x 102' (298mm x 31.1m) 100 S/F (9.3 S/M) | |

In conjunction with:

| Window and Rough Openings Flashing | VaproLiqui-Flash | BlockFlashing | VaproBond |
|------------------------------------|------------------------------------|------------------------------|--------------------------------|
| Application Temperature | 35°F to 110°F (1.7°C to 43°C) | 0°F to 180°F (-18°C to 82°C) | 20°F to 120°F (-6.7°C to 49°C) |
| Drying Capacity | High | None | Low |
| Breathable Permeability | | | |
| Application Method | Sausage Gun / Putty Knife or Brush | Utility Knife / J-Roller | Sausage Gun / Putty Knife |

Visit VaproShield.com to review additional flashing options.


BEST PRACTICE INSTALLATION




Secure membrane with stainless steel staples **above** integrated tape. Align the bottom of the upper course with the dotted line for proper 6" (15 cm) overlap.



Join horizontal seams by peeling back both release films. Tape seals horizontal seams.

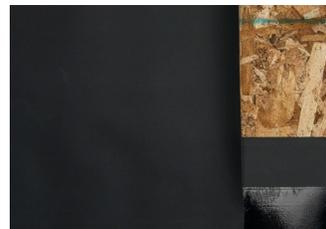

Upper course is now properly shingled over the lower course, eliminating water concerns at the horizontal joints.

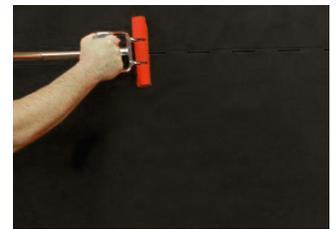


Roll the integrated tape seam with floor roller to ensure full contact

BEST PRACTICE VERTICAL SEAMS




Overlap vertical seams by min. 12". Apply 1/4" (6.4 mm) bead of VaproBond adhesive sealant to ensure water and

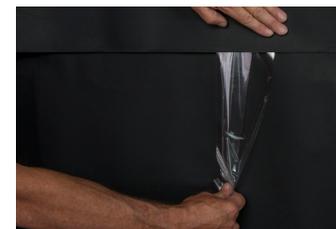

Peel back release films to finish horizontal seam. For complete installation instructions, visit VaproShield.com.

Commercial Window Rough Opening Flashing System with RevealFlashing SA

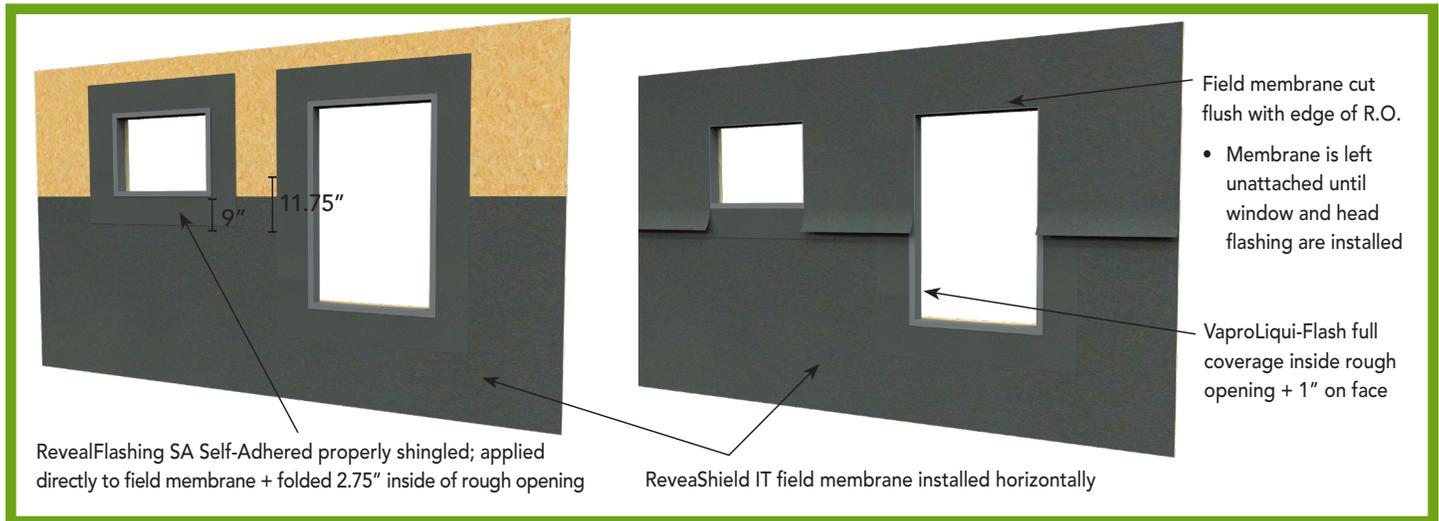

Visit VaproShield.com to view full installation sequence

RELATED LEED CREDITS

VaproShield membranes qualify for LEED credits. Visit VaproShield.com for the latest sustainability and LEED information.

Installation

STORAGE AND HANDLING

Store material rolls on end in original packaging. Protect rolls from direct sunlight and inclement weather until ready for use.

SAFETY

Work crews are safe around VaproShield membranes. RevealShield IT Integrated Tape contains zero VOCs or toxins.

PREPARATION

Fill voids and gaps in substrate greater than 7/8 inch (22.2 mm) in width to provide an even surface.

BEST PRACTICE INSTALLATION

Install **RevealShield IT** with approved fasteners in a horizontal, shingle fashion.

Horizontal overlaps must be 6" (15 cm) to properly seal the integrated tape joint.

Vertical overlaps must be minimum 12" (30 cm) and require VaproBond adhesive sealant, to provide an air barrier seal.

Vertical overlaps are to be staggered a minimum of 24" (61 cm) and should not occur directly above or below windows or doors.

Inside and outside corners can be continuous, or if a vertical joint occurs within 24" horizontally, an overlap of 12" minimum in

both directions is required, providing a double layer at the corner."

Visit www.VaproShield.com for complete installation instructions and instructional videos.

LIMITATIONS

RevealShield IT Integrated Tape should be covered with open-joint cladding within 12 months of installation.

Do not contaminate RevealShield IT Integrated Tape membrane with building site chemicals which make it more wettable (e.g., surfactants). This will adversely affect its water resistance and therefore its contribution to the water resistance of the overall wall system.

Flash fenestrations per window and door manufacturers' recommendations, local building code requirements, ASTM and AAMA guidelines.

If desired adhesion is not attained between membranes due to site conditions, VaproShield recommends applying a bead of VaproBond as an additional solution to pressure rolling.

Availability

VaproShield products are available throughout North America, Central and South America, and New Zealand.

Warranty

A 20-year material warranty is available.

PRODUCT DATA SHEET

RevealShield IT Product No.: 12309099/ RevealFlashing SA Product No.: 44305500

| TESTING DATA | | |
|--|--|--|
| PROPERTY | STANDARD | RESULT |
| Strength | | |
| Dry Tensile Strength ≥ 20 lbf/in | ASTM D828 Standard Test Method for Tensile Properties of Paper and Paperboard Using Constant-Rate-of-Elongation Apparatus | MD - 6.83 N/mm (39.0 lb/in) XMD - 3.73 N/mm (21.3 lb/in) |
| Dry Breaking Force (Grab method) MD ≥40 XMD ≥35 | ASTM D5034 Standard Test Method for Breaking Strength and Elongation of Textile Fabrics (Grab Test) | MD - 560 N (126.0 lbf) CD - 390 N (87.7 lbf) |
| Cold Mandrel Bend Test | AC38 Section 3.3.4 | Warp (Machine) Direction - No cracking Filling (Cross) Direction - No cracking |
| Weathering Tests | AC38 Section 4.1.2 UV Exposure AC38 Section 4.1.3 Accelerated Aging | UV - No visual change UV & Accelerated - visibly lighter, no visible deterioration |
| Water Vapor Transmittance | | |
| Water Vapor Transmission Desiccant Method, Procedure A, 24.4°C (76.0°F) 50 %RH | ASTM E96 Standard Test Methods for Water Vapor Transmission of Materials | 59.7 Perm (grain/h•ft²•inchHg) 3416 ng/Pa•s•m² |
| Water Vapor Transmission Water Method, Procedure B, 24.4°C (76.0°F) 50 %RH | ASTM E96 Standard Test Methods for Water Vapor Transmission of Materials | 97.6 Perm (grains/hr•ft²•inchHg) 5584 ng/Pa•s•m² |
| Water Vapor Transmission Dynamic Relative Humidity Measurement (23°C 50 %RH) | ASTM E398 Standard Test Method for Water Vapor Transmission Rate of Sheet Materials Using Dynamic Relative Humidity Measurement | 73.97 Perm (grain/h•ft²•inchHg) 4232 ng/Pa•s•m² |
| Air Resistance Testing | | |
| Air Permeance | ASTM E2178 @75 Pa Standard Test Method for Air Permeance of Building Materials | 0.017 L/s•m² @ 75 Pa (0.0033 cfm/ft² @ 1.57 psf) |
| Water Resistance Testing | | |
| Nail Sealability | ASTM D1970/ section 7.9 Standard Specification for Self-Adhering Polymer Modified Bituminous Sheet Materials Used as Steep Roofing Underlayment for Ice Dam Protection | Pass - Review Fastener Penetrations Technical Bulletin at VaproShield.com |
| Water Resistance (Boat Test) | ASTM D779 Standard Test Method for Water Resistance of Paper, Paperboard, and Other Sheet Materials by the Dry Indicator Method (Withdrawn 2011) | Control - No leakage Weathered - No Leakage |
| Water Resistance (Control after Weathering) | AATCC 127 Hydrostatic pressure test (550 mm water column for 5 hours), American Association of Textile Chemists and Colorists | Control - No leakage Weathered - No Leakage |
| Fire Testing | | |
| Flame Spread Smoke Developed | ASTM E84 Standard Test Method for Surface Burning Characteristics of Building Materials | Flame Spread 10 Smoke Developed 135 |
| Cone Calorimeter Testing Data | ASTM E1354 Standard Test Method for Heat and Visible Smoke Release Rates for Materials and Products Using an Oxygen Consumption Calorimeter | Time to ignition: 5 sec Flame Duration: 6 sec Ave. Effective Heat of Combustion: 5.1 MJ/kg Ave. HRR at 60 sec: 40 kW/m² Ave. HRR at 180 sec: 0 Peak HRR: 50 kW/m² Time of Peak: 2 Total HRR/A: 40.4 MJ/m² |
| NFPA 285 Compliant | | View over 50 compliant assemblies with various manufacturers at VaproShield.com or Contact VaproShield Technical Team, 1-866-731-7663 opt. 5 |