

NFPA 285 Compliant Wall Assembly

Exterior to Interior - Ref:1001

Cast Artificial Stone - Cultured Stone, Xci Plv and Xci Ply (Class A), Concrete

Cast Artificial Stone - Cultured Stone, Xci Ply and Xci Ply (Class A), Concrete

WrapShield SA Self-Adhered is a self-adhered, water resistive (WRB) vapor permeable air barrier sheet membrane adhered directly to substrate. RevealShield SA Self-Adhered is a black, UV stable, water resistive (WRB) vapor permeable self-adhered air barrier membrane for open joint rain screen cladding systems.

Per Chapter 26 of the International Building Code, the wall assembly shall be tested in accordance with and comply with the acceptance criteria of NFPA 285. The listed assemblies in this document have met that criteria according to Hunter Panels. Visit hunterpanels.com for verification.



Wall Component	Materials	Illustration for explanatory purposes only.
Base Wall System	Concrete Wall (cast in place or precast)	
Approved Exterior Finish	Cast Artifical Stone, Cultured Stone—Minimum 1½" thick Any non-open joint installation technique such as shiplap n	. , 3
Material Options	1) 4.2" max thickness of Hunter Xci Ply , inclusive of factor or FSC ® Certified Fire Treated Plywood within overall max 2) 4.7" max thickness of Hunter Xci Ply , inclusive of factor or FSC ® Certified Fire Treated Plywood within overall max	thickness y adhered 5/8" or ¾" Fire Treated Plywood
Floorline Firestopping	Not Applicable	

Stud Cavity	Not Applicable
-------------	----------------

Exterior Sheathing	Not Applicable
--------------------	----------------

Weather Resistive	
Membrane Applied	VaproShield WrapShield SA Self-Adhered, RevealShield SA Self-Adhered
to Base Wall	

Weather Resistive	
Membrane Applied	VaproShield WrapShield SA Self-Adhered, RevealShield SA Self-Adhered
to Exterior Insulation	

The location and number of WRB's in the wall assembly are determined by the architect. See p.2 for additional illustrations showing VaproShield WRB/Air Barrier placement.





NFPA 285 Compliant Wall Assembly

Exterior to Interior - Ref:1001

Cast Artificial Stone - Cultured Stone, Xci Ply and Xci Ply (Class A), Concrete

VaproShield WRB/Air Barrier Placement Variations as per Hunter NFPA 285 Test Data

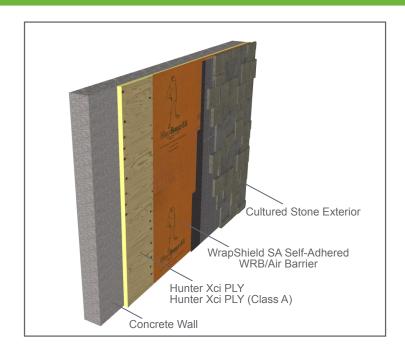

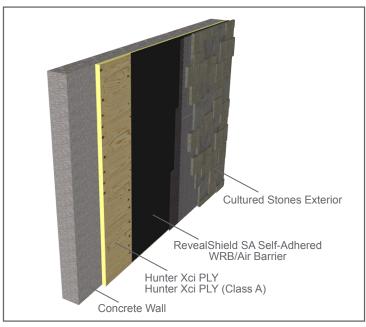

Comprehensive details available at VaproShield.com. Illustration for explanatory purposes only.