



VAPROSHIELD LLC
 915 26TH AVE. N.W. SUITE C5
 GIG HARBOR, WASHINGTON 98335
 TOLL FREE: 1-866-731-7663
 FAX: (253) 858-3297
www.vaproshield.com

WrapShield SA Self-Adhered WRB/Air Barrier
 installed minimum 3" over WrapFlashing SA

Membrane shingles over metal head flashing (by
 others)


WrapFlashing SA Self-Adhered
 properly shingled; applied directly to
 sheathing + folder 2.75" inside of R.O.

VaproLiqui-Flash or VaproBond Sealant
 inside rough opening and 1" on face.
 Vapro-LiquiFlash recommended for wood
 framing

WrapFlashing SA Self-Adhered
 properly shingled; applied directly to
 sheathing + folder 2.75" inside of R.O.

WrapShield SA Self-Adhered WRB/Air
 Barrier installed minimum 3" over
 WrapFlashing SA

Nail Flange Window: flanges sealed to
 cured VaproLiqui-Flash or VaproBond
 w/ VaproBond Sealant – 3/8" min.
 bead @ jambs and head only. Interior
 backer rod and sealant by others

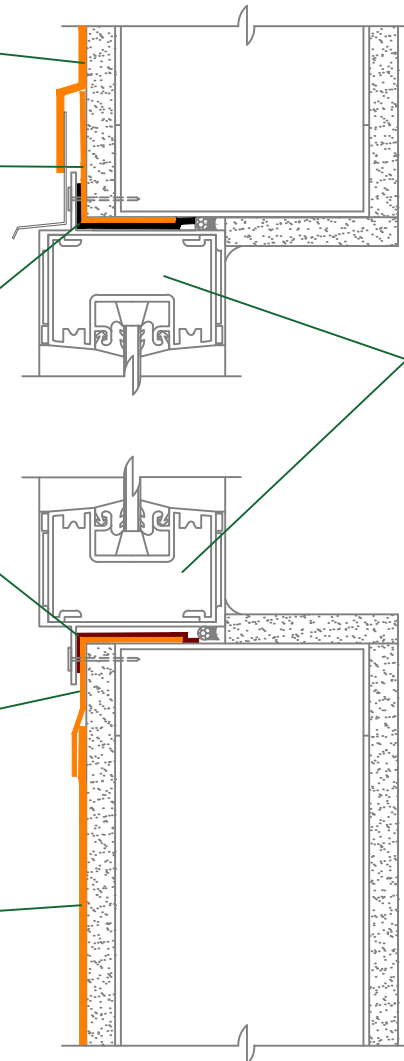

MANUFACTURER NOTES:

1. DETAIL SKETCH IS GENERIC, REPRESENTING SUGGESTED BEST PRACTICES FOR VAPROSHIELD MATERIALS, AND DOES NOT REPRESENT A SPECIFIC JOB SITE CONDITION AND THEREFORE MAY NOT BE APPLICABLE TO CERTAIN PROJECTS.
2. DETAIL SKETCH IS DESIGNED FOR USE AS A REFERENCE AND MUST BE APPROVED BY THE DESIGNER/ CONSULTANT OF RECORD FOR EACH PROJECT PRIOR TO INSTALLATION BY THE SUBCONTRACTOR.
3. CHANGES AND APPROVALS OF VAPROSHIELD DETAILS ARE THE SOLE RESPONSIBILITY OF THE DESIGNER/CONSULTANT OF RECORD.
4. VAPROSHIELD IS NOT THE DESIGNER OF RECORD FOR BUILDING ENCLOSURE DETAILS AND TAKES NO RESPONSIBILITY FOR THE ACCURACY OR INTERPRETATION OF ACTUAL PROJECT SITE CONDITIONS.

NOTES:

1. INSTALLATION TO BE COMPLETED IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS.
2. DO NOT SCALE DRAWING.
3. THIS DRAWING IS INTENDED FOR USE BY ARCHITECTS, ENGINEERS, CONTRACTORS, CONSULTANTS AND DESIGN PROFESSIONALS FOR PLANNING PURPOSES ONLY. THIS DRAWING MAY NOT BE USED FOR CONSTRUCTION.
4. ALL INFORMATION CONTAINED HEREIN WAS CURRENT AT THE TIME OF DEVELOPMENT BUT MUST BE REVIEWED AND APPROVED BY THE PRODUCT MANUFACTURER TO BE CONSIDERED ACCURATE.