

Nail Flange Window Rough Opening Flashing: Exploded

1.) VaproFlashing SA Self Adhered Sill Piece applied directly to sheathing + fully embedded 2.75" inside of R.O. with VaproLiqui-flash. Release film to be left on bottom 6" of flashing to create shingle effect with field membrane

2.) VaproFlashing SA Self Adhered Jamb Pieces applied directly to sheathing at edge of rough opening and outer edge + fully embedded 2.75" inside of R.O. and top edge with VaproLiqui-Flash


3.) VaproFlashing SA Self Adhered Head Piece applied directly to sheathing at edge of rough opening and top edge + fully embedded 2.75" inside of R.O. and top edge with VaproLiqui-Flash

4.) VaproLiqui-Flash @ inside rough opening + 1" on face

5.) Head flashing (by others) over VaproLiqui-Flash embedded in VaproBond

6.) Window with Nailing Flange

7.) VaproBond Sealant @ head left and right jamb flanges

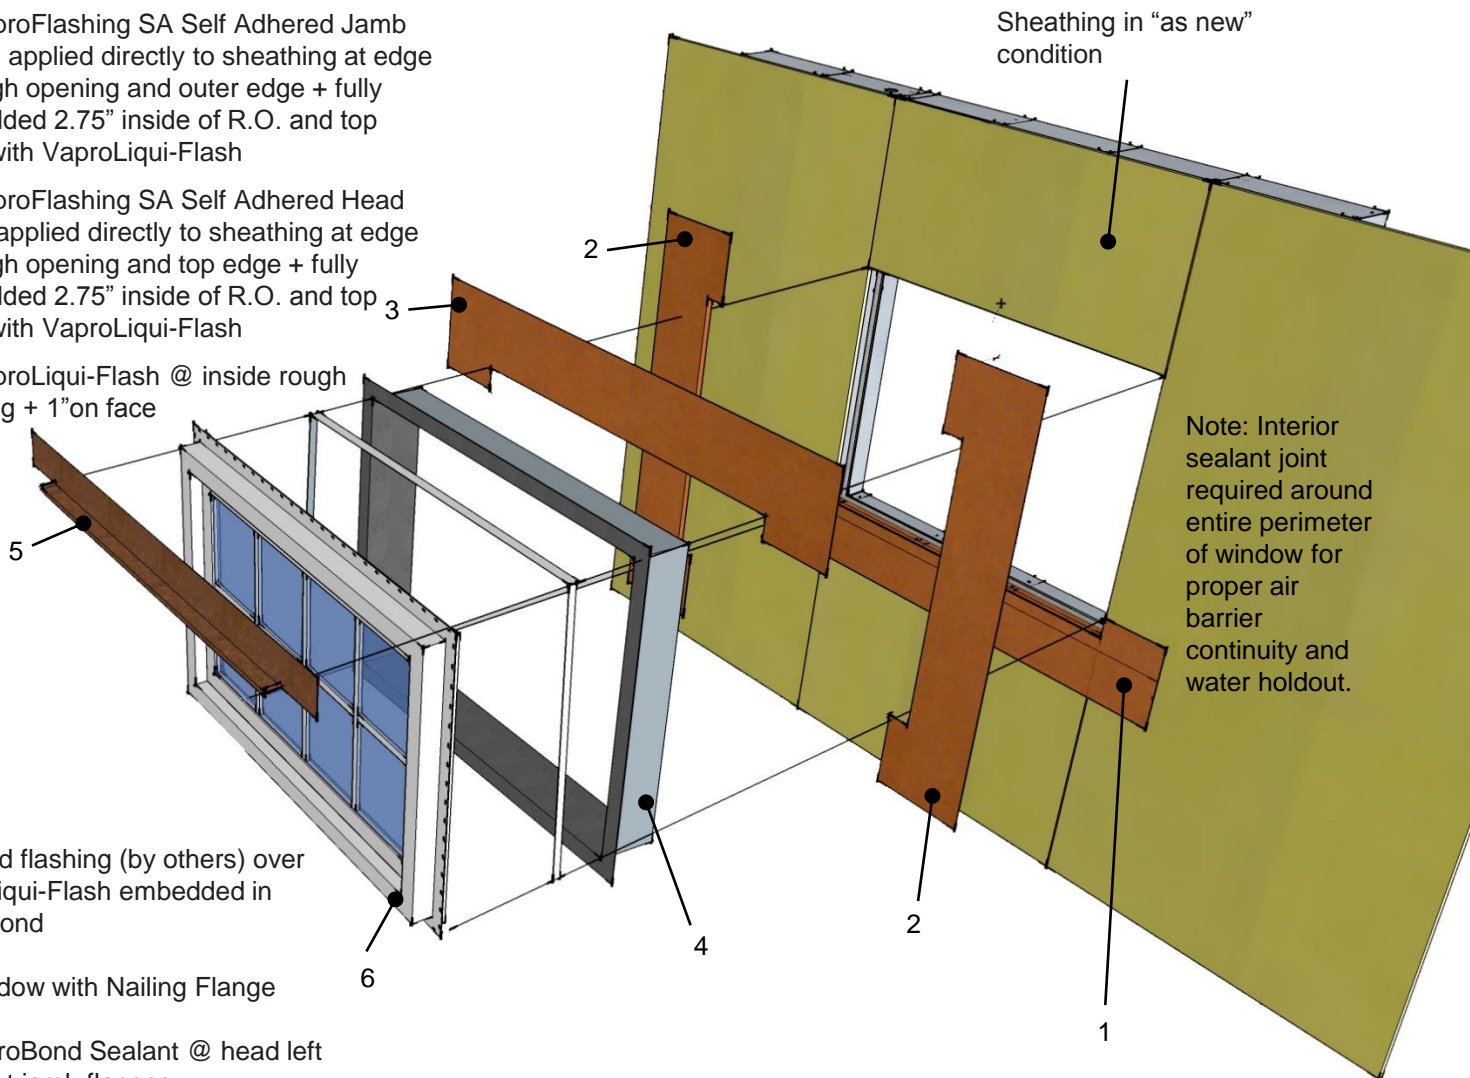

VAPROLIQUI-FLASH™

PRODUCT DESCRIPTION

VaproLiqui-Flash is a liquid applied, vapor permeable, waterproof, air barrier flashing system component for window and door rough openings. VaproLiquiFlash is designed to work with VaproFlashing and VaproShield field membranes as a complete system.

DISCLAIMER

Detail sketch is generic, representing suggested best practices for VaproShield materials, and does not represent a specific job site condition and therefore may not be applicable to certain projects. Detail sketch is designed for use as a reference and must be approved by the designer/consultant of record for each project prior to installation by the subcontractor. Changes and approvals of VaproShield details are the sole responsibility of the designer/consultant of record. VaproShield is not the designer of record for building enclosure details and takes no responsibility for the accuracy or interpretation of actual project site conditions.

DRAWN BY: BV

DATE: 12/2015

REF: 101

Always check www.VaproShield.com for the latest details and installation instructions