





Vapro-SS Flashing Rough Opening Cut Patterns

VaproBond or VaproLiqui-Flash 1/2" tooled fillet bead at each corner where inside of R.O. meets face of sheathing.

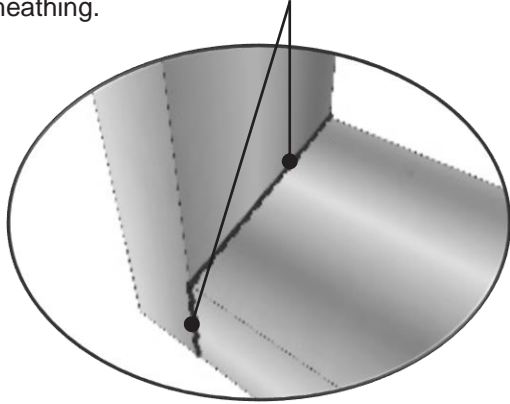

Section is adhered to inside of RO, 1/2" past window

Fold toward back of flashing, creating 2" flap to adhere to RO face

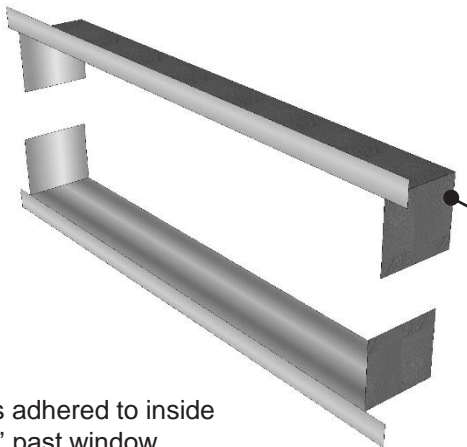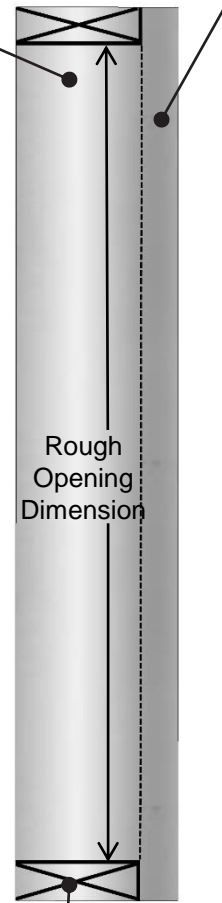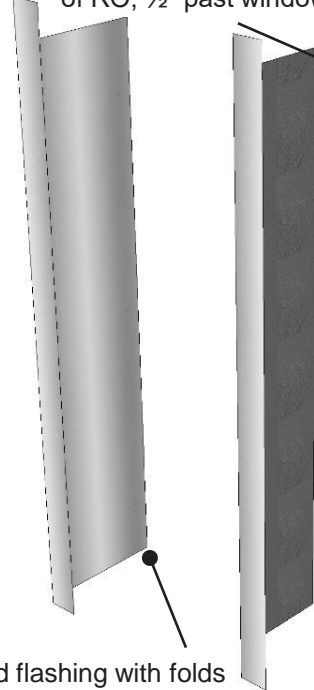


Completed flashing with folds

Rough Opening Dimension

Section is adhered to inside of RO, 1/2" past window

Fold toward face of Flashing 3" from edge

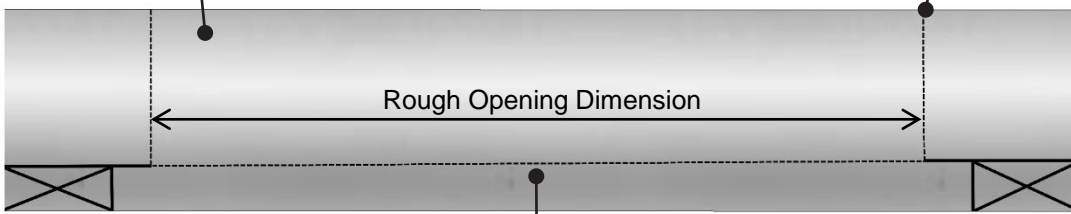

Fold toward back of flashing, creating 2" flap to adhere to RO face

2" x 2" rectangle to be cut out, leaving 2" tab extending beyond 3" flap

VAPRO-SS FLASHING™

PRODUCT DESCRIPTION

Vapro-SS Flashing has been designed with a flexible 2 mil sheet of type 304 stainless steel, 8 mils of butyl adhesive and a siliconized release liner. Vapro-SS Flashing is a self-adhering metal flashing that offers best in class puncture and tear resistance. It can be applied from 20°F (-6°C) to 170°F (77°C) and stays stable and air tight from -70°F (21°C) to 200°F (93°C)

DISCLAIMER

Detail sketch is generic, representing suggested best practices for VaproShield materials, and does not represent a specific job site condition and therefore may not be applicable to certain projects. Detail sketch is designed for use as a reference and must be approved by the designer/consultant of record for each project prior to installation by the subcontractor. Changes and approvals of VaproShield details are the sole responsibility of the designer/consultant of record. VaproShield is not the designer of record for building enclosure details and takes no responsibility for the accuracy or interpretation of actual project site conditions.

DRAWN BY: AR

DATE: 03.21.16

REF: 140

Always check www.VaproShield.com for the latest details and installation instructions